

2017

INVOLIGHT
Join the bright side of life !



PASSION

IN ALL WORKS

ABOUT INVOLIGHT®

We are proud to introduce our brand INVOLIGHT®. We are manufacturer of lighting equipment and special effects for the entertainment and architectural market.

We offer a selected assortment of lights, special effects and control devices for mobile performers, DJs, clubs, corporate events and more and we can assure that all our products meet the high quality requirements.

Before we add a device to our range, it is carefully examined and checked. Due to the fact that we attach great importance to the feedback of our customers, we always pay attention to the practical applications of our products, which is appreciated by many users. The devices are delivered with detailed multi-language instructions. In addition, our network of dealers consists of carefully selected companies, who are happy to help with advice and action!

MOVING HEADS

WASH, SPOT, BEAM, EFFECT LIGHTS



LED MH78W




MOVING MINI WASH WITH 7 X 8W 4IN1 RGBW LED

MOVING MINI WASH MIT 7 X 8W 4IN1 RGBW LED

LYRE MINI WASH 7 X 8W 4IN1 RGBW LED

ORDER CODE

A-000000-02562



Product type / Produktart / Type de produit	Moving Head Wash
Color spectrum / Farbspektrum / Spectre de couleur	RGBW
Number of LED / LED Anzahl / Nombre de LED	7
LED type / LED Typ / type de LED	8W 4IN1
Illuminance / Beleuchtungsstärke / Luminosité	6850Lux@1m
Beam Angle / Abstrahlwinkel / Angle d'ouverture	25°
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	5 or 13 channels
PAN movement / PAN Bewegung / Mouvement PAN	540°
TILT movement / TILT Bewegung / Mouvement TILT	180°
Strobe / Hochfrequenz Stroboskop / Stroboscope	1 - 20 Hz
Controls / Bedienelemente / Contrôles	Mode/ESC, Up, Down, Enter
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	IEC input
Operating voltage / Betriebsspannung / Alimentation	230V AC, 50Hz
Power consumption / Leistungsaufnahme / Consommation	80 W
Dimensions / Abmessungen / Dimensions	280 x 220 x 270 mm
Weight / Gewicht / Poids	3.5 kg

ORDER CODE A-000000-02563

LEDMH315TCOB

MOVING MINI WASH WITH 3 X 15W 3IN1 RGB COB LED

MOVING MINI WASH MIT 3 X 15W 3IN1 RGB COB LED

MINI LYRE WASH 3 X 15W 3IN1 RGB COB LED



Product type / Produktart / Type de produit	Moving Head Wash
Color spectrum / Farbspektrum / Spectre de couleur	RGB
Number of LED / LED Anzahl / Nombre de LED	3
LED type / LED Typ / type de LED	15W 3IN1
Illuminance / Beleuchtungsstärke / Luminosité	2560Lux@1m
Beam Angle / Abstrahlwinkel / Angle d'ouverture	45°
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	11 channels
PAN movement / PAN Bewegung / Mouvement PAN	540°
TILT movement / TILT Bewegung / Mouvement TILT	180°
Strobe / Hochfrequenz Stroboskop / Stroboscope	1 - 20 Hz
Controls / Bedienelemente / Contrôles	Mode/ESC, Up, Down, Enter
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	IEC input
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	65 W
Dimensions / Abmessungen / Dimensions	280 x 220 x 270 mm
Weight / Gewicht / Poids	3,5 kg

LEDMH1210B


A-000000-02566

ORDER CODE

MOVING HEAD WASH WITH 12 X 10W 4IN1 RGBW LED

MOVING HEAD WASH MIT 12 X 10W 4IN1 RGBW LED

LYRE MOTORISÉE WASH 12 X 10W 4IN1 RGBW LED

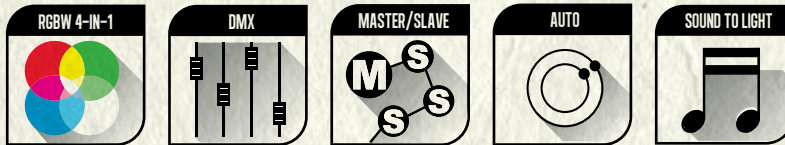

Product type / Produktart / Type de produit	Moving Head Wash
Color spectrum / Farbspektrum / Spectre de couleur	RGBW
Number of LED / LED Anzahl / Nombre de LED	12
LED type / LED Typ / type de LED	10W 4IN1
Illuminance / Beleuchtungsstärke / Luminosité	27770Lux@1m
Beam Angle / Abstrahlwinkel / Angle d'ouverture	35°
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	13 channels
PAN movement / PAN Bewegung / Mouvement PAN	630°
TILT movement / TILT Bewegung / Mouvement TILT	200°
Strobe / Hochfrequenz Stroboskop / Stroboscope	1 - 20 Hz
Controls / Bedienelemente / Contrôles	Menu, Up, Down, Enter
Display	LCD
Power connector / Stromversorgungsanschluss / Raccordement	IEC input and output
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	150 W
Dimensions / Abmessungen / Dimensions	370 x 340 x 230 mm
Weight / Gewicht / Poids	4,9 kg



ORDER CODE A-000000-02564



Product type / Produktart / Type de produit	Moving Head Wash
Color spectrum / Farbspektrum / Spectre de couleur	RGBW
Number of LED / LED Anzahl / Nombre de LED	36
LED type / LED Typ / type de LED	8W 4IN1
Illuminance / Beleuchtungsstärke / Luminosité	16110Lux - 4050Lux @ 1m
Beam Angle / Abstrahlwinkel / Angle d'ouverture	18° - 55°
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	14 channels
PAN movement / PAN Bewegung / Mouvement PAN	540°
TILT movement / TILT Bewegung / Mouvement TILT	270°
Strobe / Hochfrequenz Stroboskop / Stroboscope	1 - 20 Hz
Controls / Bedienelemente / Contrôles	Touch screen
Display	TFT
Power connector / Stromversorgungsanschluss / Raccordement	Power connector input and output
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	380 W
Dimensions / Abmessungen / Dimensions	420 x 300 x 400 mm
Weight / Gewicht / Poids	9,5 kg

LEDMH368ZW

MOVING HEAD WASH WITH 36 X 8W 4IN1 RGBW LED, MOTORIZED ZOOM
 MOVING HEAD WASH MIT 36 X 8W 4IN1 RGBW LED, MOTORISIERTER ZOOM
 LYRE LED WASH 36 X 8W 4IN1 RGBW LED, ZOOM MOTORISÉ



18°-55°



LEDMH720W

MOVING HEAD WASH WITH 7 X 20W 4IN1 RGBW LED, MOTORIZED ZOOM
 MOVING HEAD WASH MIT 7 X 20W 4IN1 RGBW LED, MOTORISIERTER ZOOM
 LYRE LED WASH 7 X 20W 4IN1 RGBW LED, ZOOM MOTORISÉ






11°-58°



A-000000-02560

ORDER CODE




Product type / Produktart / Type de produit	Moving Head Wash
Color spectrum / Farbspektrum / Spectre de couleur	RGBW
Number of LED / LED Anzahl / Nombre de LED	7
LED type / LED Typ / type de LED	20W 4IN1
Illuminance / Beleuchtungsstärke / Luminosité	40500Lux - 5720Lux@1m
Beam Angle / Abstrahlwinkel / Angle d'ouverture	11°-58°
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	14 or 29 channels
PAN movement / PAN Bewegung / Mouvement PAN	180°, 360°, 540°
TILT movement / TILT Bewegung / Mouvement TILT	90°, 180°, 270°
Strobe / Hochfrequenz Stroboskop / Stroboscope	1 - 20 Hz
Controls / Bedienelemente / Contrôles	Mode/ESC, Up, Down, Enter
Display	LCD
Power connector / Stromversorgungsanschluss / Raccordement	IEC input and output
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	185 W
Dimensions / Abmessungen / Dimensions	339 x 247 x 371 mm
Weight / Gewicht / Poids	9,5 kg

ORDER CODE A-000000-02561

LEDMH1915W

MOVING HEAD WASH WITH 19 X 15W 4IN1 RGBW LED, MOTORIZED ZOOM
MOVING HEAD WASH MIT 19 X 15W 4IN1 RGBW LED, MOTORISIERTER ZOOM
LYRE LED WASH 19 X 15W 4IN1 RGBW LED, ZOOM MOTORISÉ

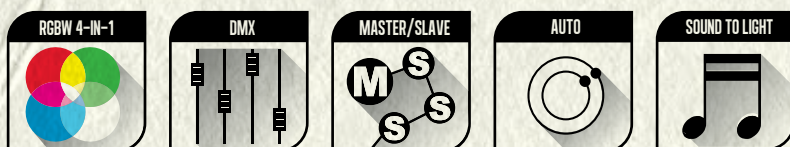

11°-58°

Product type / Produktart / Type de produit	Moving Head Wash
Color spectrum / Farbspektrum / Spectre de couleur	RGBW
Number of LED / LED Anzahl / Nombre de LED	19
LED type / LED Typ / type de LED	15W 4IN1
Illuminance / Beleuchtungsstärke / Luminosité	66000Lux-11750Lux@1m
Beam Angle / Abstrahlwinkel / Angle d'ouverture	11° - 58°
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	14 or 34 channels
PAN movement / PAN Bewegung / Mouvement PAN	180°, 360°, 540°
TILT movement / TILT Bewegung / Mouvement TILT	90°, 180°, 270°
Strobe / Hochfrequenz Stroboskop / Stroboscope	1 - 20 Hz
Controls / Bedienelemente / Contrôles	Mode/ESC, Up, Down, Enter
Display	LCD
Power connector / Stromversorgungsanschluss / Raccordement	IEC input and output
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	320 W
Dimensions / Abmessungen / Dimensions	450 x 330 x 440 mm
Weight / Gewicht / Poids	11 kg



LEDMH50S




MOVING HEAD SPOT WITH 55W LED

MOVING HEAD SPOT MIT 55W LED

LYRE DE TYPE SPOT 55W LED

A-000000-02552

ORDER CODE




Product type / Produktart / Type de produit	Moving Head Spot
Number of LED / LED Anzahl / Nombre de LED	1
LED type / LED Typ / type de LED	55W white
Color wheel / Farbrad / Roue couleur	8 colors + open
Gobo wheel / Goborad / Roue gobo	7 rotating gobos + open
Prism / Prisma / Prisme	Rotatable 3-facet
Focus / Fokus / Focus	Manual
Illuminance / Beleuchtungsstärke / Luminosité	10450Lux@2m
Beam Angle / Abstrahlwinkel / Angle d'ouverture	15°
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	8 or 13 channels
PAN movement / PAN Bewegung / Mouvement PAN	180°, 360°, 540°
TILT movement / TILT Bewegung / Mouvement TILT	90°, 180°, 270°
Strobe / Hochfrequenz Stroboskop / Stroboscope	1 -20 Hz
Controls / Bedienelemente / Contrôles	Setup, Up, Down, Enter
Display	LCD
Power connector / Stromversorgungsanschluss / Raccordement	IEC input and output
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	95 W
Dimensions / Abmessungen / Dimensions	336 x 211 x 232 mm
Weight / Gewicht / Poids	5,6 kg



PROSPOT50

LED MOVING HEAD SPOT WITH 50W LED
 LED MOVING HEAD SPOT MIT 50W LED
 LYRE DE TYPE SPOT 50W LED

ORDER CODE A-000000-04893

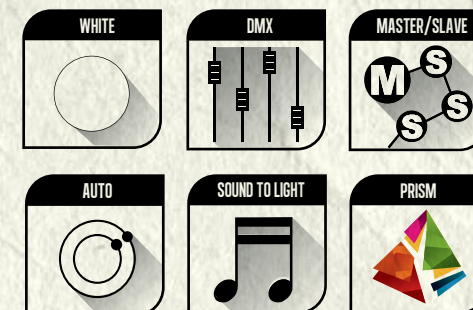

Product type / Produktart / Type de produit	Moving Head Spot
Number of LED / LED Anzahl / Nombre de LED	1
LED type / LED Typ / type de LED	50W white
Color wheel / Farbrad / Roue couleur	7 colors + open
Gobo wheel / Goborad / Roue gobo	6 rotating gobos + open
Prism / Prisma / Prisme	Rotatable 3-facet
Focus / Fokus / Focus	Motorized
Illuminance / Beleuchtungsstärke / Luminosité	70760Lux@1m
Beam Angle / Abstrahlwinkel / Angle d'ouverture	11,9°
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	11 or 13 channels
PAN movement / PAN Bewegung / Mouvement PAN	360°, 540°, 630°
TILT movement / TILT Bewegung / Mouvement TILT	90°, 180°, 255°
Strobe / Hochfrequenz Stroboskop / Stroboscope	1 - 20Hz
Controls / Bedienelemente / Contrôles	Mode/ESC, Up, Down, Enter
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	Power connector input
Operating voltage / Betriebsspannung / Alimentation	90-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	150W
Dimensions / Abmessungen / Dimensions	149 x 270 x 366 mm
Weight / Gewicht / Poids	6,6 kg



11,9°




ALSO AVAILABLE IN QUAD FLIGHT CASE.

VENTUS S40

MOVING HEAD SPOT WITH 40W LED

MOVING HEAD SPOT MIT 40W LED

LYRE DE TYPE SPOT 40W LED

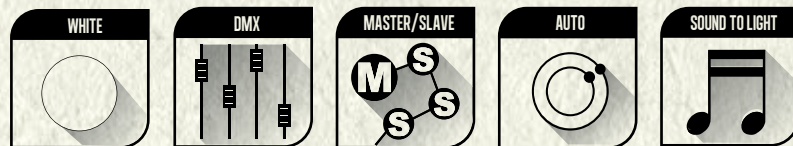

A-000000-05858

ORDER CODE



Product type / Produktart / Type de produit	Moving Head Spot
Number of LED / LED Anzahl / Nombre de LED	1
LED type / LED Typ / type de LED	40W white
Number of LED rings / LED Anzahl Ringe / Nombre de LED anneau lumineux	76
LED type rings / LED Typ Ringe / type de LED anneau lumineux	SMD 3IN1 RGB
Color wheel / Farbrad / Roue couleur	9 colors + open
Gobo wheel / Goborad / Roue gobo	9 gobos + open
Focus / Fokus / Focus	Manual
Illuminance / Beleuchtungsstärke / Luminosité	8800Lux@3m
Beam Angle / Abstrahlwinkel / Angle d'ouverture	4,7°
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	12 or 23 channels
PAN movement / PAN Bewegung / Mouvement PAN	630°
TILT movement / TILT Bewegung / Mouvement TILT	200°
Strobe / Hochfrequenz Stroboskop / Stroboscope	1 - 20Hz
Controls / Bedienelemente / Contrôles	Menu/ESC, Up, Down, Enter
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	IEC input
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	76 W
Dimensions / Abmessungen / Dimensions	368 x 264 x 168mm
Weight / Gewicht / Poids	4,85 kg

LEDMH77S


MOVING HEAD SPOT WITH 75W LED

MOVING HEAD SPOT MIT 75W LED

LYRE DE TYPE SPOT 75W LED

A-000000-05512 ORDER CODE

Product type / Produktart / Type de produit	Moving Head Spot
Number of LED / LED Anzahl / Nombre de LED	1
LED type / LED Typ / type de LED	75W white
Color wheel / Farbrad / Roue couleur	8 colors + open
Gobo wheel / Goborad / Roue gobo	7 rotating gobos + open
Prism / Prisma / Prisme	Rotatable 3-facet
Focus / Fokus / Focus	Motorized
Illuminance / Beleuchtungsstärke / Luminosité	50100Lux@1m
Beam Angle / Abstrahlwinkel / Angle d'ouverture	13°
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	15 or 19 channels
PAN movement / PAN Bewegung / Mouvement PAN	540°
TILT movement / TILT Bewegung / Mouvement TILT	280°
Strobe / Hochfrequenz Stroboskop / Stroboscope	1 - 20 Hz
Controls / Bedienelemente / Contrôles	Menu, Up, Down, Enter
Indicators / Anzeigeelemente / Affichage	LCD Display
Power connector / Stromversorgungsanschluss / Raccordement	Power connector input and output
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	120 W
Cooling / Kühlung / Refroidissement	Fan / Lüfter / Ventilateur
Dimensions / Abmessungen / Dimensions	330 x 320 x 455 mm
Weight / Gewicht / Poids	10,5 kg

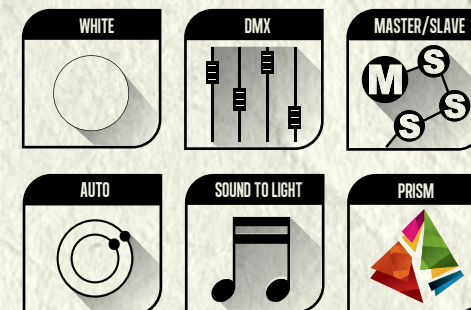

13°




ALSO AVAILABLE IN TWIN FLIGHT CASE.

LEDMH127S

MOVING HEAD SPOT WITH 120W LED

MOVING HEAD SPOT MIT 120W LED

LYRE DE TYPE SPOT 120W LED

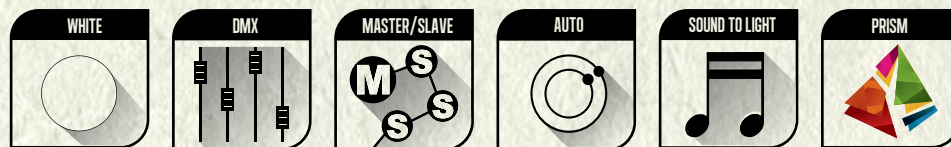

13°



A-000000-05513 ORDER CODE

ALSO AVAILABLE IN TWIN FLIGHT CASE.

Product type / Produktart / Type de produit	Moving Head Spot
Number of LED / LED Anzahl / Nombre de LED	1
LED type / LED Typ / type de LED	120W white
Color wheel / Farbrad / Roue couleur	8 colors + open
Gobo wheel / Goborad / Roue gobo	7 rotating gobos + open
Prism / Prisma / Prisme	Rotatable 3-facet
Focus / Fokus / Focus	Motorized
Illuminance / Beleuchtungsstärke / Luminosité	107700Lux@1m
Beam Angle / Abstrahlwinkel / Angle d'ouverture	13°
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	15 or 19 channels
PAN movement / PAN Bewegung / Mouvement PAN	540°
TILT movement / TILT Bewegung / Mouvement TILT	280°
Strobe / Hochfrequenz Stroboskop / Stroboscope	1 - 20 Hz
Controls / Bedienelemente / Contrôles	Menu, Up, Down, Enter
Display	LCD
Power connector / Stromversorgungsanschluss / Raccordement	Power connector input and output
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	170W
Dimensions / Abmessungen / Dimensions	330 x 320 x 455 mm
Weight / Gewicht / Poids	10,5 kg

LEDMH120S PRO

MOVING HEAD SPOT WITH 120W LED
 MOVING HEAD SPOT MIT 120W LED
 LYRE DE TYPE SPOT 120W LED



ORDER CODE A-000000-02553



19°

INCLUDING UV-FILTER, 3200K AND 5600K CORRECTION FILTERS



Product type / Produktart / Type de produit	Moving Head Spot
Number of LED / LED Anzahl / Nombre de LED	1
LED type / LED Typ / type de LED	120W white
Color wheel 1 / Farbrad 1/ Roue couleur 1	7 colors + open
Color wheel 2 / Farbrad 2/ Roue couleur 2	7 colors + open
Gobo wheel / Goborad / Roue gobo	7 rotating gobos + open
Prism / Prisma / Prisme	Rotatable 3-facet
Focus / Fokus / Focus	Motorized
Illuminance / Beleuchtungsstärke / Luminosité	75800Lux@1m; 7600Lux@3m
Beam Angle / Abstrahlwinkel / Angle d'ouverture	19°
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	11 or 16 channels
PAN movement / PAN Bewegung / Mouvement PAN	180°/360°/540°
TILT movement / TILT Bewegung / Mouvement TILT	90°/180°/280°
Strobe / Hochfrequenz Stroboskop / Stroboscope	1 - 20 Hz
Controls / Bedienelemente / Contrôles	Menu, Up, Down, Enter
Display	LCD
Power connector / Stromversorgungsanschluss / Raccordement	IEC input
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	279W
Dimensions / Abmessungen / Dimensions	423 x 302 x 496 mm
Weight / Gewicht / Poids	21 kg

PROSPOT300

MOVING HEAD SPOT WITH 120W LED

MOVING HEAD SPOT MIT 120W LED


LYRE DE TYPE SPOT 120W LED

ORDER CODE A-000000-05670

Product type / Produktart / Type de produit	Moving Head Spot
Number of LED / LED Anzahl / Nombre de LED	1
LED type / LED Typ / type de LED	120W white
Color wheel / Farbrad / Roue couleur	8 colors + open
Gobo wheel 1 / Gaborad 1/ Roue gobo 1	7 rotating gobos + open
Gobo wheel 2 / Gaborad 2/ Roue gobo 2	9 static gobos + open
Prism / Prisma / Prisme	Rotatable 3-facet
Focus / Fokus / Focus	Motorized
Illuminance / Beleuchtungsstärke / Luminosité	111200Lux@1m; 11430Lux@3m
Beam Angle / Abstrahlwinkel / Angle d'ouverture	13°
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	12 or 14 channels
PAN movement / PAN Bewegung / Mouvement PAN	540°
TILT movement / TILT Bewegung / Mouvement TILT	270°
Strobe / Hochfrequenz Stroboskop / Stroboscope	1 - 20 Hz
Controls / Bedienelemente / Contrôles	Menu, Up, Down, Enter
Display	LCD
Power connector / Stromversorgungsanschluss / Raccordement	PowerCON input and output
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	212W
Dimensions / Abmessungen / Dimensions	310 x 310 x 476 mm
Weight / Gewicht / Poids	13,5 kg



ALSO AVAILABLE IN TWIN FLIGHT CASE.

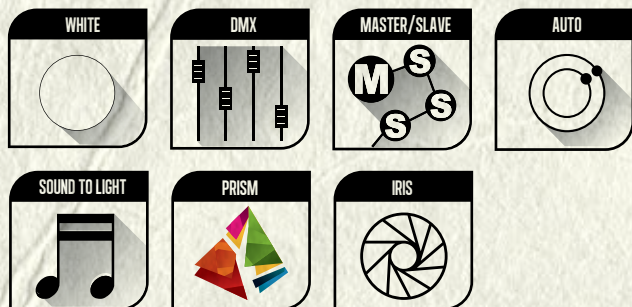

PROSPOT500

MOVING HEAD SPOT WITH 180W LED
MOVING HEAD SPOT MIT 180W LED
LYRE DE TYPE SPOT 180W LED

A-000000-05671 ORDER CODE


Product type / Produktart / Type de produit	Moving Head Spot
Number of LED / LED Anzahl / Nombre de LED	1
LED type / LED Typ / type de LED	180W white
Color wheel 1 / Farbrad 1 / Roue couleur 1	7 colors + open
Color wheel 2 / Farbrad 2 / Roue couleur 2	7 colors + open
Gobo wheel 1 / Goborad 1/ Roue gobo 1	7 rotating gobos + open
Gobo wheel 2 / Goborad 2/ Roue gobo 2	8 static gobos + open
Prism / Prisma / Prisme	Rotatable 3-facet
Focus / Fokus / Focus	Motorized
Illuminance / Beleuchtungsstärke / Luminosité	176300Lux@1m; 22190Lux@3m
Beam Angle / Abstrahlwinkel / Angle d'ouverture	15,4°
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	16 or 18 channels
PAN movement / PAN Bewegung / Mouvement PAN	540°
TILT movement / TILT Bewegung / Mouvement TILT	270°
Controls / Bedienelemente / Contrôles	Menu, Up, Down, Enter
Display	LCD
Power connector / Stromversorgungsanschluss / Raccordement	PowerCON input and output
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	255W
Dimensions / Abmessungen / Dimensions	387 x 355 x 493,5 mm
Weight / Gewicht / Poids	18,5 kg

TRINITY280

MOVING HEAD SPOT/WASH/BEAM WITH HRI 280W
 MOVING HEAD SPOT/WASH/BEAM MIT HRI 280W
 LYRE DE TYPE SPOT/WASH/BEAM AVEC HRI 280W

A-000000-05672

ORDER CODE

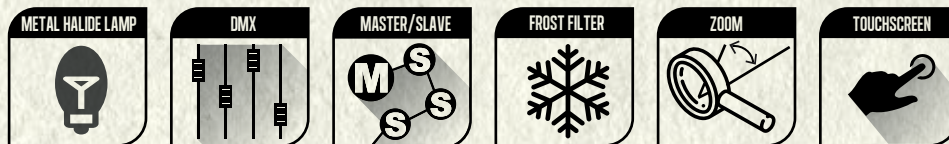

Product type / Produktart / Type de produit	Moving Head Spot/Wash/Beam
Light source / Lichtquelle / Source de lumière	Sirius HRI 280W
Color wheel / Farbrad / Roue couleur	13 colors + open
Gobo wheel 1 / Gaborad 1/ Roue gobo 1	9 rotating gobos + open
Gobo wheel 2 / Gaborad 2/ Roue gobo 2	14 static gobos + open
Prism / Prisma / Prisme	Rotatable 6-facet and 8-facet
Zoom range beam / Zoombereich Beam / Zoom beam	2,7°-11°
Zoom range spot / Zoombereich Spot / Zoom spot	5,3°-23°
Illuminance / Beleuchtungsstärke / Luminosité	82650Lux@10m
Strobe / Hochfrequenz Stroboskop / Stroboscope	> 14 Hz
DMX input / DMX Eingang / Entrée DMX	3-pin XLR and 5-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR and 5-pin XLR
DMX Mode / DMX Modus / Mode DMX	16 or 24 channels
PAN movement / PAN Bewegung / Mouvement PAN	540°
TILT movement / TILT Bewegung / Mouvement TILT	270°
Controls / Bedienelemente / Contrôles	Touch screen
Display	LCD 2,8 inch
Power connector / Stromversorgungsanschluss / Raccordement	PowerCON input and output
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	400W
Dimensions / Abmessungen / Dimensions	287 x 390 x 583mm
Weight / Gewicht / Poids	15 kg



2,7°-23°



INCLUDING RETRACTABLE CLAMPS.
 ALSO AVAILABLE IN TWIN FLIGHT CASE.

MINIBEAM30

MOVING HEAD BEAM WITH 30W LED

MOVING HEAD BEAM MIT 30W LED

LYRE DE TYPE BEAM 30W LED

ORDER CODE A-000000-04075



Product type / Produktart / Type de produit	Moving Head Bem
Color spectrum / Farbspektrum / Spectre de couleur	white
Number of LED / LED Anzahl / Nombre de LED	1
LED type / LED Typ / type de LED	30W
Illuminance / Beleuchtungsstärke / Luminosité	12300@5m
Beam Angle / Abstrahlwinkel / Angle d'ouverture	3°
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	6 or 8 channels
PAN movement / PAN Bewegung / Mouvement PAN	630°
TILT movement / TILT Bewegung / Mouvement TILT	235°
Strobe / Hochfrequenz Stroboskop / Stroboscope	1 - 20Hz
Controls / Bedienelemente / Contrôles	Menu, Up, Down, Enter
Display	LCD
Power connector / Stromversorgungsanschluss / Raccordement	Power connector input and output
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	37 W
Dimensions / Abmessungen / Dimensions	162 x 128 x 287 mm
Weight / Gewicht / Poids	2 kg

LEDMH77B

MOVING HEAD BEAM WITH 75W LED

MOVING HEAD BEAM MIT 75W LED

LYRE DE TYPE BEAM 75W LED

ORDER CODE

A-000000-04899



Product type / Produktart / Type de produit	Moving Head Beam
Number of LED / LED Anzahl / Nombre de LED	1
LED type / LED Typ / type de LED	75W white
Color wheel / Farbrad / Roue couleur	8 colors + open
Gobo wheel / Goborad / Roue gobo	8 static gobos + open
Prism / Prisma / Prisme	Rotatable 8-facet
Focus / Fokus / Focus	Motorized
Illuminance / Beleuchtungsstärke / Luminosité	33300Lux@5m
Beam Angle / Abstrahlwinkel / Angle d'ouverture	3,5°
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	15 or 19 channels
PAN movement / PAN Bewegung / Mouvement PAN	540°
TILT movement / TILT Bewegung / Mouvement TILT	280°
Strobe / Hochfrequenz Stroboskop / Stroboscope	1 - 20 Hz
Controls / Bedienelemente / Contrôles	Menu, Up, Down, Enter
Display	LCD
Power connector / Stromversorgungsanschluss / Raccordement	Power connector input and output
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	160W
Dimensions / Abmessungen / Dimensions	330 x 320 x 475 mm
Weight / Gewicht / Poids	10,5 kg



LEDMH127B

MOVING HEAD BEAM WITH 120W LED
MOVING HEAD BEAM MIT 120W LED
LYRE DE TYPE BEAM 120W LED

A-000000-05428

ORDER CODE

Product type / Produktart / Type de produit	Moving Head Beam
Number of LED / LED Anzahl / Nombre de LED	1
LED type / LED Typ / type de LED	120W white
Color wheel / Farbrad / Roue couleur	8 colors + open
Gobo wheel / Goborad / Roue gobo	8 static gobos + open
Prism / Prisma / Prisme	Rotatable 8-facet
Focus / Fokus / Focus	Motorized
Illuminance / Beleuchtungsstärke / Luminosité	35100Lux@5m
Beam Angle / Abstrahlwinkel / Angle d'ouverture	3,5°
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	15 or 19 channels
PAN movement / PAN Bewegung / Mouvement PAN	540°
TILT movement / TILT Bewegung / Mouvement TILT	280°
Strobe / Hochfrequenz Stroboskop / Stroboscope	> 20 Hz
Controls / Bedienelemente / Contrôles	Menu, Up, Down, Enter
Display	LCD
Power connector / Stromversorgungsanschluss / Raccordement	Power connector input and output
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	170W
Dimensions / Abmessungen / Dimensions	330 x 320 x 475 mm
Weight / Gewicht / Poids	10,5 kg



ALSO AVAILABLE IN TWIN FLIGHTCASE.

PROBEAM50


MOVING HEAD BEAM WITH 50W LED

MOVING HEAD BEAM MIT 50W LED

LYRE DE TYPE BEAM 50W LED

A-000000-05456

ORDER CODE

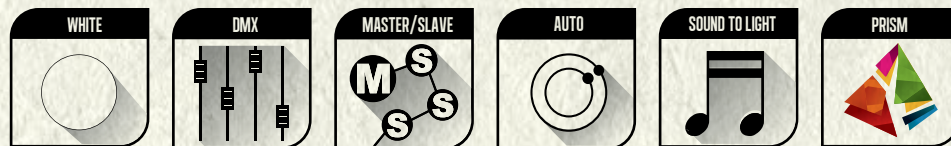

Product type / Produktart / Type de produit	Moving Head Beam
Number of LED / LED Anzahl / Nombre de LED	1
LED type / LED Typ / type de LED	50W white
Color wheel / Farbrad / Roue couleur	14 colors + open
Gobo wheel / Gaborad / Roue gobo	17 static gobos + open
Prism / Prisma / Prisme	Rotatable 8-facet
Focus / Fokus / Focus	Motorized
Illuminance / Beleuchtungsstärke / Luminosité	19680Lux@5m
Beam Angle / Abstrahlwinkel / Angle d'ouverture	2°
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	10 or 12 channels
PAN movement / PAN Bewegung / Mouvement PAN	360° / 540° / 630°
TILT movement / TILT Bewegung / Mouvement TILT	90° / 180° / 255°
Strobe / Hochfrequenz Stroboskop / Stroboscope	1 - 20 Hz
Controls / Bedienelemente / Contrôles	Menu, Up, Down, Enter
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	Power connector input
Operating voltage / Betriebsspannung / Alimentation	90-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	150W
Dimensions / Abmessungen / Dimensions	149 x 270 x 364 mm
Weight / Gewicht / Poids	6,8 kg

QUALITY GLASS LENS.



2°



ALSO AVAILABLE IN QUAD FLIGHTCASE.

LEDMH140B

MOVING HEAD BEAM WITH LUMINUS CBT-140 LED

MOVING HEAD BEAM MIT LUMINUS CBT-140 LED

LYRE DE TYPE BEAM LUMINUS CBT-140 LED

ORDER CODE A-000000-02549



Product type / Produktart / Type de produit	Moving Head Beam
Number of LED / LED Anzahl / Nombre de LED	1
LED type / LED Typ / type de LED	Luminus CBT-140
Color wheel / Farbrad / Roue couleur	14 colors + open
Gobo wheel / Goborad / Roue gobo	17 static gobos + open
Prism / Prisma / Prisme	Rotatable 8-facet
Focus / Fokus / Focus	Motorized
Illuminance / Beleuchtungsstärke / Luminosité	43000Lux@5m
Beam Angle / Abstrahlwinkel / Angle d'ouverture	2,25°
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	8 or 14 channels
PAN movement / PAN Bewegung / Mouvement PAN	180° / 360° / 540°
TILT movement / TILT Bewegung / Mouvement TILT	90° / 180° / 270°
Strobe / Hochfrequenz Stroboskop / Stroboscope	1 - 20 Hz
Controls / Bedienelemente / Contrôles	Menu, Up, Down, Enter
Display	LCD
Power connector / Stromversorgungsanschluss / Raccordement	IEC input and output
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	230W
Dimensions / Abmessungen / Dimensions	346 x 247 x 522 mm
Weight / Gewicht / Poids	19,5 kg

MOVINGBEAM410

MOTORIZED BEAM LIGHT EFFECT WITH 4 X 10W WHITE LED
 MOTORISIERTES BEAM-LICHTEFFEKTGERÄT MIT 4 X 10W LED WEISS
 BARRE ROTATIVE LED 4 X 10W BLANC (MATRIÇABLE)

A-000000-04894

ORDER CODE



3°



Product type / Produktart / Type de produit	Motorized beam light effect
Color spectrum / Farbspektrum / Spectre de couleur	White
Number of LED / LED Anzahl / Nombre de LED	4
LED type / LED Typ / type de LED	10W
Illuminance / Beleuchtungsstärke / Luminosité	92900Lux@1m
Beam Angle / Abstrahlwinkel / Angle d'ouverture	3°
DMX input / DMX Eingang / Entrée DMX	3-pin XLR and 5-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR and 5-pin XLR
DMX Mode / DMX Modus / Mode DMX	1, 10 or 14 channels
PAN movement / PAN Bewegung / Mouvement PAN	540° or infinity
TILT movement / TILT Bewegung / Mouvement TILT	200°
Strobe / Hochfrequenz Stroboskop / Stroboscope	> 20 Hz
Controls / Bedienelemente / Contrôles	Mode/ESC, Up, Down, Enter
Display	LCD
Power connector / Stromversorgungsanschluss / Raccordement	Power connector input and output
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	70W
Dimensions / Abmessungen / Dimensions	555 x 95 x 210 mm
Weight / Gewicht / Poids	6,8 kg

MOVINGBEAM410Q

MOTORIZED BEAM LIGHT EFFECT WITH 4 X 10W 4IN1 RGBW LED
 MOTORISIERTES BEAM-LICHTEFFEKTGERÄT MIT 4 X 10W 4IN1 RGBW LED
 BARRE ROTATIVE LED 4 X 10W 4IN1 RGBW


ORDER CODE A-000000-04895



3°



Product type / Produktart / Type de produit	Motorized beam light effect
Color spectrum / Farbspektrum / Spectre de couleur	RGBW
Number of LED / LED Anzahl / Nombre de LED	4
LED type / LED Typ / type de LED	10W
Illuminance / Beleuchtungsstärke / Luminosité	17680Lux@1m
Beam Angle / Abstrahlwinkel / Angle d'ouverture	3°
DMX input / DMX Eingang / Entrée DMX	3-pin XLR and 5-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR and 5-pin XLR
DMX Mode / DMX Modus / Mode DMX	1, 22 or 26 channels
PAN movement / PAN Bewegung / Mouvement PAN	540° or infinity
TILT movement / TILT Bewegung / Mouvement TILT	200°
Strobe / Hochfrequenz Stroboskop / Stroboscope	> 20 Hz
Controls / Bedienelemente / Contrôles	Mode/ESC, Up, Down, Enter
Display	LCD
Power connector / Stromversorgungsanschluss / Raccordement	Power Connector input and output
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	70W
Dimensions / Abmessungen / Dimensions	555 x 95 x 210 mm
Weight / Gewicht / Poids	6,8 kg

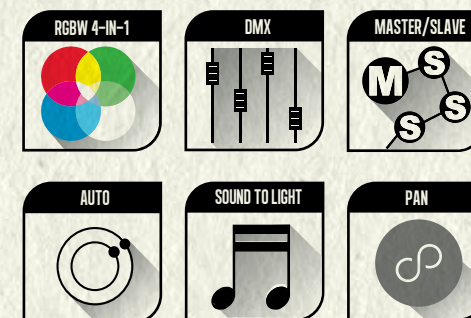

VENTUS R33

MOTORIZED BEAM LIGHT EFFECT WITH 9 X 10W 4IN1 RGBW LED
 MOTORISIERTES BEAM-LICHTEFFEKTGERÄT MIT 9 X 10W 4IN1 RGBW LED
 BARRE ROTATIVE LED 9 X 10W 4IN1 RGBW

ORDER CODE A-000000-05857



Product type / Produktart / Type de produit	Motorized beam light effect
Color spectrum / Farbspektrum / Spectre de couleur	RGBW
Number of LED / LED Anzahl / Nombre de LED	9
LED type / LED Typ / type de LED	10W 4IN1
TILT movement / TILT Bewegung / Mouvement TILT	200° or infinity
PAN movement / PAN Bewegung / Mouvement PAN	630°
Beam Angle / Abstrahlwinkel / Angle d'ouverture	9°
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	12 or 22 channels
Strobe / Hochfrequenz Stroboskop / Stroboscope	> 20 Hz
Controls / Bedienelemente / Contrôles	Menu, Up, Down, Enter
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	IEC input
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	120W
Dimensions / Abmessungen / Dimensions	336 x 265 x 152 mm
Weight / Gewicht / Poids	5,4 kg

Product type / Produktart / Type de produit	Motorized beam light effect
Color spectrum / Farbspektrum / Spectre de couleur	White
Number of LED / LED Anzahl / Nombre de LED	8
LED type / LED Typ / type de LED	9W
TILT movement / TILT Bewegung / Mouvement TILT	180°
Beam Angle / Abstrahlwinkel / Angle d'ouverture	3°
DMX input / DMX Eingang / Entrée DMX	3-pin XLR and 5-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR and 5-pin XLR
DMX Mode / DMX Modus / Mode DMX	1, 12 or 16 channels
Strobe / Hochfrequenz Stroboskop / Stroboscope	> 20 Hz
Controls / Bedienelemente / Contrôles	Mode, Up, Down, Enter
Display	LCD
Power connector / Stromversorgungsanschluss / Raccordement	Power connector input and output
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	72W
Dimensions / Abmessungen / Dimensions	1065 x 95 x 177 mm
Weight / Gewicht / Poids	9 kg

MOVINGBAR2409

MOTORIZED BEAM LIGHT EFFECT WITH 8 X 9W WHITE LED
MOTORISIERTES BEAM-LICHTEFFEKTERÄT MIT 8 X 9W LED WEISS
BARRE ROTATIVE LED 8 X 9W BLANC (MATRIÇABLE)

A-000000-04896

ORDER CODE





MOVINGBAR2410Q

MOTORIZED BEAM LIGHT EFFECT WITH 8 X 10W 4IN1 RGBW LED
 MOTORISIERTES BEAM-LICHTEFFEKTTGERÄT MIT 8 X 10W 4IN1 RGBW LED
 BARRE ROTATIVE LED 8 X 10W RGBW

A-000000-04897

ORDER CODE

Product type / Produktart / Type de produit	Motorized beam light effect
Color spectrum / Farbspektrum / Spectre de couleur	RGBW
Number of LED / LED Anzahl / Nombre de LED	8
LED type / LED Typ / type de LED	10W 4IN1
TILT movement / TILT Bewegung / Mouvement TILT	180°
Beam Angle / Abstrahlwinkel / Angle d'ouverture	3°
DMX input / DMX Eingang / Entrée DMX	3-pin XLR and 5-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR and 5-pin XLR
DMX Mode / DMX Modus / Mode DMX	1, 36 or 40 channels
Strobe / Hochfrequenz Stroboskop / Stroboscope	> 20 Hz
Controls / Bedienelemente / Contrôles	Mode, Up, Down, Enter
Display	LCD
Power connector / Stromversorgungsanschluss / Raccordement	Power connector input and output
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	110W
Dimensions / Abmessungen / Dimensions	1065 x 95 x 177 mm
Weight / Gewicht / Poids	9 kg



3°

Product type / Produktart / Type de produit	Motorized beam light effect
Color spectrum / Farbspektrum / Spectre de couleur	White
Number of LED / LED Anzahl / Nombre de LED	8
LED type / LED Typ / type de LED	10W
TILT movement / TILT Bewegung / Mouvement TILT	180°
Beam Angle / Abstrahlwinkel / Angle d'ouverture	3°
DMX input / DMX Eingang / Entrée DMX	3-pin XLR and 5-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR and 5-pin XLR
DMX Mode / DMX Modus / Mode DMX	6 or 14 channels
Strobe / Hochfrequenz Stroboskop / Stroboscope	> 20 Hz
Controls / Bedienelemente / Contrôles	Mode, Up, Down, Enter
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	Power connector input and output
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	90W
Dimensions / Abmessungen / Dimensions	1065 x 75 x 160 mm
Weight / Gewicht / Poids	7,7 kg

MOVINGBAR1810

MOTORIZED BEAM LIGHT EFFECT WITH 8 X 10W WHITE LED
 MOTORISIERTES BEAM-LICHTEFFEKTGERÄT MIT 8 X 10W LED WEISS
 BARRE ROTATIVE LED 8 X 10W BLANC (MATRIÇABLE)

A-000000-04892

ORDER CODE





3°

TWINBEAM2410

MOTORIZED BEAM LIGHT EFFECT WITH 8 X 10W WHITE LED
 MOTORISIERTES BEAM-LICHTEFFEKTGERÄT MIT 8 X 10W LED WEISS
 BARRE ROTATIVE LED 8 X 10 W BLANC (MATRIÇABLE)

ORDER CODE A-000000-04001

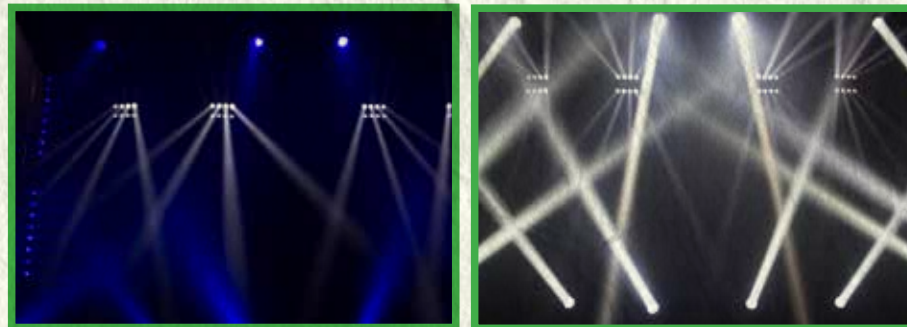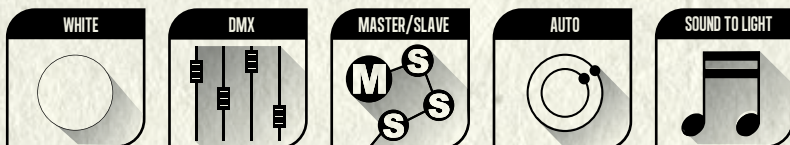

Product type / Produktart / Type de produit	Motorized beam light effect
Color spectrum / Farbspektrum / Spectre de couleur	White
Number of LED / LED Anzahl / Nombre de LED	8
LED type / LED Typ / type de LED	10W 4IN1
TILT movement / TILT Bewegung / Mouvement TILT	180°
Beam Angle / Abstrahlwinkel / Angle d'ouverture	5,2°
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	16 or 18 channels
Strobe / Hochfrequenz Stroboskop / Stroboscope	> 20 Hz
Controls / Bedienelemente / Contrôles	Mode, Up, Down, Enter
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	IEC input and output
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	100W
Dimensions / Abmessungen / Dimensions	400 x 255 x 160mm
Weight / Gewicht / Poids	4,95 kg

WASH / SPOT LIGHTING

INDOOR




LEDPAR180

LEDPAR WITH 177 X 10MM RGBA LED

LEDPAR MIT 177 X 10MM RGBA LED


PROJECTEUR PAR À 177 X 10MM LED RGBA

ORDER CODE A-000000-04002

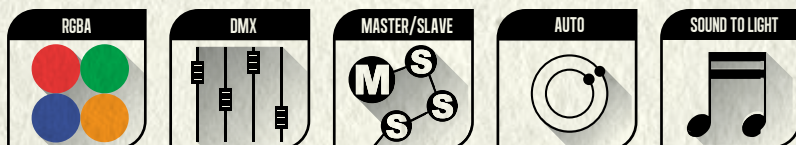

Color spectrum / Farbspektrum / Spectre de couleur	RGBA
Number of LED / LED Anzahl / Nombre de LED	177
LED type / LED Typ / type de LED	10mm
Beam Angle / Abstrahlwinkel / Angle d'ouverture	30°
Illuminance / Beleuchtungsstärke / Luminosité	3520 Lux @ 1m
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	1, 4, 5 or 7 channels
Controls / Bedienelemente / Contrôles	Mode, Setup, Up, Down
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	IEC input and output
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	30 W
Dimensions / Abmessungen / Dimensions	290 x 295 x 100 mm
Weight / Gewicht / Poids	1.6 kg



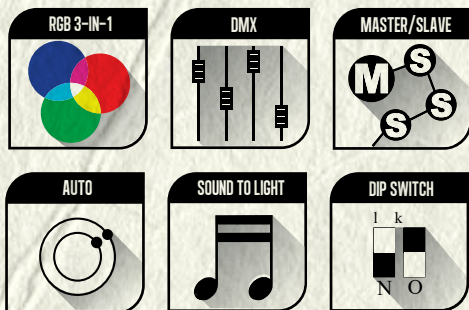

LEDSPOT433

LEDPAR WITH 4 X 3W 3IN1 RGB LED
 LEDPAR MIT 4 X 3W 3IN1 RGB LED
 PROJECTEUR PAR À 4 X 3W 3IN1 RGB LED

A-000000-01617 **ORDER CODE**



Color spectrum / Farbspektrum / Spectre de couleur	RGB
Number of LED / LED Anzahl / Nombre de LED	4
LED type / LED Typ / type de LED	3W 3IN1
Beam Angle / Abstrahlwinkel / Angle d'ouverture	25°
Illuminance / Beleuchtungsstärke / Luminosité	2690Lux @ 1m
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	6 channels
Controls / Bedienelemente / Contrôles	DIP
Display	-
Power connector / Stromversorgungsanschluss / Raccordement	IEC input and output
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	13,5 W
Dimensions / Abmessungen / Dimensions	120 x 87 x 173 mm
Weight / Gewicht / Poids	0,58 kg


SLIMPAR784

LED PAR WITH 7 X 8W 4IN1 RGBW LED

LED PAR MIT 7 X 8W 4IN1 RGBW LED

PROJECTEUR PAR À 7 X 8W 4IN1 RGBW LED

ORDER CODE A-000000-01624

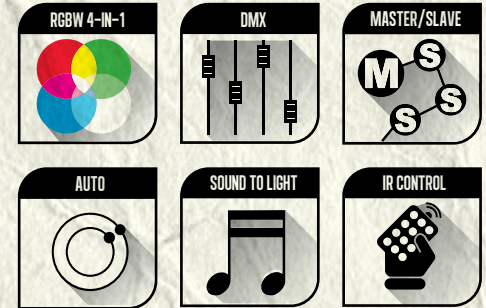

IRC OPTIONAL AVAILABLE

Color spectrum / Farbspektrum / Spectre de couleur	RGBW
Number of LED / LED Anzahl / Nombre de LED	7
LED type / LED Typ / type de LED	8W 4IN1
Beam Angle / Abstrahlwinkel / Angle d'ouverture	40°
Illuminance / Beleuchtungsstärke / Luminosité	5350 Lux @ 1m
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	4 or 6 channels
Controls / Bedienelemente / Contrôles	Menu, Up, Down, Enter
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	IEC input and output
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	65 W
Dimensions / Abmessungen / Dimensions	245 x 245 x 150 mm
Weight / Gewicht / Poids	1.3 kg

LEDPANEL7T

LEDPAR WITH 7 X 3W 3IN1 RGB LED

LEDPAR MIT 7 X 3W 3IN1 RGB LED

PROJECTEUR PAR À 7 X 3W 3IN1 RGB LED

ORDER CODE

A-000000-01604



NO FAN.



40°




Color spectrum / Farbspektrum / Spectre de couleur	RGB
Number of LED / LED Anzahl / Nombre de LED	7
LED type / LED Typ / type de LED	3W 3IN1
Beam Angle / Abstrahlwinkel / Angle d'ouverture	40°
Illuminance / Beleuchtungsstärke / Luminosité	4650 Lux @ 1m
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	3, 4 or 8 channels
Controls / Bedienelemente / Contrôles	Mode, Setup, Up, Down
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	IEC input and output
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	30 W
Dimensions / Abmessungen / Dimensions	300 x 200 x 60 mm
Weight / Gewicht / Poids	2,6 kg

LEDSPOT54

LEDPAR WITH 5 X 5W 4IN1 RGBW LED
 LEDPAR MIT 5 X 5W 4IN1 RGBW LED
 PROJECTEUR PAR À 5 X 5W 4IN1 RGBW LED

A-000000-01619

ORDER CODE

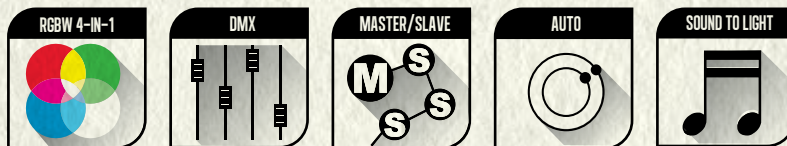

Color spectrum / Farbspektrum / Spectre de couleur	RGBW
Number of LED / LED Anzahl / Nombre de LED	5
LED type / LED Typ / type de LED	5W 4IN1
Beam Angle / Abstrahlwinkel / Angle d'ouverture	25°
Illuminance / Beleuchtungsstärke / Luminosité	12020Lux @ 1m
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	7 channels
Controls / Bedienelemente / Contrôles	Mode, Setup, Up, Down
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	IEC input and output
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	28 W
Dimensions / Abmessungen / Dimensions	255 x 235 x 100 mm
Weight / Gewicht / Poids	1,5 kg



25°



SLIMPAR56 PRO

LEDPAR WITH 5 X 10W 6IN1 RGBWA+UV LED

LEDPAR MIT 5 X 10W 6IN1 RGBWA+UV LED

PROJECTEUR PAR À 5 X 10W 6IN1 LED RGBWA+UV

ORDER CODE

A-000000-01621



40°



TEMPERATURE CONTROLLED FAN



Color spectrum / Farbspektrum / Spectre de couleur	RGBWA+UV
Number of LED / LED Anzahl / Nombre de LED	5
LED type / LED Typ / type de LED	10W 6IN1
Beam Angle / Abstrahlwinkel / Angle d'ouverture	40°
Illuminance / Beleuchtungsstärke / Luminosité	5550 Lux @ 1m
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	6, 7, 8 or 9 channels
Controls / Bedienelemente / Contrôles	Mode, Setup, Up, Down
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	IEC input and output
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	45W
Dimensions / Abmessungen / Dimensions	265x245x115 mm
Weight / Gewicht / Poids	2,7 kg

SLIMPAR126 PRO

LEDPAR WITH 12 X 10W 6IN1 RGBWA+UV LED

LEDPAR MIT 12 X 10W RGBWA+UV LED

PROJECTEUR PAR À 12 X 10W LED RGBWA+UV



ORDER CODE A-000000-01622




40°



TEMPERATURE CONTROLLED FAN



Color spectrum / Farbspektrum / Spectre de couleur	RGBWA+UV
Number of LED / LED Anzahl / Nombre de LED	12
LED type / LED Typ / type de LED	10W 6IN1
Beam Angle / Abstrahlwinkel / Angle d'ouverture	40°
Illuminance / Beleuchtungsstärke / Luminosité	12470Lux @ 1m
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	6, 7, 8 or 9 channels
Controls / Bedienelemente / Contrôles	Mode, Setup, Up, Down
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	IEC input and output
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	105 W
Dimensions / Abmessungen / Dimensions	310x285x115 mm
Weight / Gewicht / Poids	3,4 kg

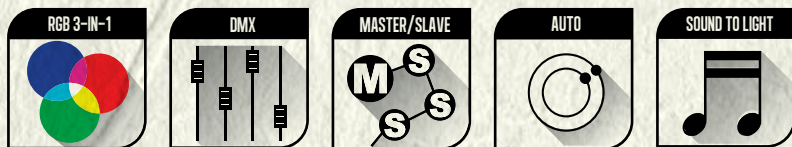

LEDSPOT123

LEDPAR WITH 12 X 3W 3IN1 RGB LED
 LEDPAR MIT 12 X 3W 3IN1 RGB LED
 PROJECTEUR PAR À 12 X 3W 3IN1 RGB LED

A-000000-01618

ORDER CODE



Color spectrum / Farbspektrum / Spectre de couleur	RGB
Number of LED / LED Anzahl / Nombre de LED	12
LED type / LED Typ / type de LED	3W 3IN1
Beam Angle / Abstrahlwinkel / Angle d'ouverture	25°
Illuminance / Beleuchtungsstärke / Luminosité	16700 Lux @ 1m
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	3, 5 or 6 channels
Controls / Bedienelemente / Contrôles	Mode, Setup, Up, Down
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	IEC input and output
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	40 W
Dimensions / Abmessungen / Dimensions	315 x 275 x 100 mm
Weight / Gewicht / Poids	2,1 kg




LEDSPOT124

LEDPAR WITH 12 X 5W 4IN1 RGBW LED

LEDPAR MIT 12 X 5W 4IN1 RGBW LED

PROJECTEUR PAR À 12 X 5W 4IN1 RGBW LED

ORDER CODE A-000000-01620



Color spectrum / Farbspektrum / Spectre de couleur	RGBW
Number of LED / LED Anzahl / Nombre de LED	12
LED type / LED Typ / type de LED	5W 4IN1
Beam Angle / Abstrahlwinkel / Angle d'ouverture	25°
Illuminance / Beleuchtungsstärke / Luminosité	23170 Lux @ 1m
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	7 channels
Controls / Bedienelemente / Contrôles	Mode, Setup, Up, Down
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	IEC input and output
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	65 W
Dimensions / Abmessungen / Dimensions	315 x 275 x 100 mm
Weight / Gewicht / Poids	2,1 kg



LEDPAR65

LEDPAR WITH 6 X 10W 5IN1 RGBWA LED

LEDPAR MIT 6 X 10W 5IN1 RGBWA LED

PROJECTEUR PAR À 6 X 10W 5IN1 RGBWA LED

ORDER CODE

A-000000-01637




Color spectrum / Farbspektrum / Spectre de couleur	RGBWA
Number of LED / LED Anzahl / Nombre de LED	6
LED type / LED Typ / type de LED	10W 5IN1
Beam Angle / Abstrahlwinkel / Angle d'ouverture	25°
Illuminance / Beleuchtungsstärke / Luminosité	8030 Lux @ 1m
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	5, 7 or 9 channels
Controls / Bedienelemente / Contrôles	Mode, Setup, Up, Down
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	IEC input and output
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	60 W
Dimensions / Abmessungen / Dimensions	238 x 104 x 255 mm
Weight / Gewicht / Poids	2,3 kg

LEDSPOT95

LEDPAR WITH 9 X 10W 5IN1 RGBWA LED
 LEDPAR MIT 9 X 10W 5IN1 RGBWA LED
 PROJECTEUR PAR À 9 X 10W 5IN1 RGBWA LED


A-000000-01626

ORDER CODE

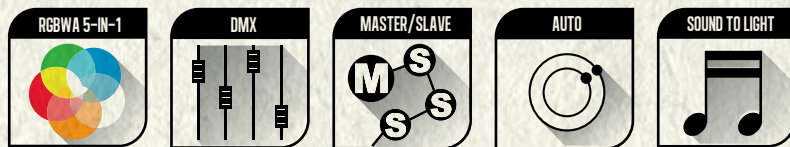

Color spectrum / Farbspektrum / Spectre de couleur	RGBWA
Number of LED / LED Anzahl / Nombre de LED	9
LED type / LED Typ / type de LED	10W 5IN1
Beam Angle / Abstrahlwinkel / Angle d'ouverture	25°
Illuminance / Beleuchtungsstärke / Luminosité	11260 Lux @ 1m
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	5, 7 or 9 channels
Controls / Bedienelemente / Contrôles	Mode, Setup, Up, Down
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	IEC input and output
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	84 W
Dimensions / Abmessungen / Dimensions	263 x 295 x 88 mm
Weight / Gewicht / Poids	2,7 kg



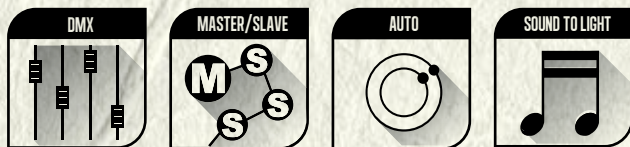

COBPAR100W

LEDPAR WITH 100W COB LED WHITE
 LEDPAR MIT 100W COB LED WEISS
 PROJECTEUR PAR À 100W COB LED BLANC (MATRIÇABLE)

A-000000-01634 **ORDER CODE**



Color spectrum / Farbspektrum / Spectre de couleur	Warm white
Number of LED / LED Anzahl / Nombre de LED	1
LED type / LED Typ / type de LED	100W COB
Beam Angle / Abstrahlwinkel / Angle d'ouverture	100°
Illuminance / Beleuchtungsstärke / Luminosité	4640Lux @ 1m
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	3 channels
Controls / Bedienelemente / Contrôles	Mode, Up, Down, Setup
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	Power cord
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	120 W
Dimensions / Abmessungen / Dimensions	370 x 250 x 250 mm
Weight / Gewicht / Poids	2,7 kg






BARNDORF OPTIONAL.
 TEMPERATURE CONTROLLED FAN.

COBPAR100HEX

LEDPAR WITH 100W COB 6IN1 RGBWA+UV LED
 LEDPAR MIT 100W COB 6IN1 RGBWA+UV LED
 PROJECTEUR PAR À 100W COB 6IN1 RGBWA+UV LED

ORDER CODE A-000000-05738



COB LED



100°



BARNDORF OPTIONAL.
 TEMPERATURE CONTROLLED FAN.

Color spectrum / Farbspektrum / Spectre de couleur	RGBWA+UVV
Number of LED / LED Anzahl / Nombre de LED	1
LED type / LED Typ / type de LED	100W 6IN1 COB
Beam Angle / Abstrahlwinkel / Angle d'ouverture	90°
Illuminance / Beleuchtungsstärke / Luminosité	3220Lux @ 1m
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	3 channels
Controls / Bedienelemente / Contrôles	Mode, Setup, Up, Down
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	Power cord
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	120 W
Dimensions / Abmessungen / Dimensions	370 x 250 x 250 mm
Weight / Gewicht / Poids	3,8 kg

COBPAR65T


LEDPAR WITH 60W COB 3IN1 RGB LED

LEDPAR MIT 60W COB 3IN1 RGB LED

PROJECTEUR PAR À 60W COB 3IN1 RGB LED

ORDER CODE

A-000000-01629



COB LED

NO FAN.



90°




Color spectrum / Farbspektrum / Spectre de couleur	RGB
Number of LED / LED Anzahl / Nombre de LED	1
LED type / LED Typ / type de LED	60W 3IN1 COB
Beam Angle / Abstrahlwinkel / Angle d'ouverture	90°
Illuminance / Beleuchtungsstärke / Luminosité	2650Lux @ 1m
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	3, 6 or 7 channels
Controls / Bedienelemente / Contrôles	Mode, Setup, Up, Down
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	IEC input and output
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	65 W
Dimensions / Abmessungen / Dimensions	279 x 156 x 330 mm
Weight / Gewicht / Poids	3,7 kg

LEDZOOM189

LEDPAR WITH 18 x 3W 3IN1 RGB LED, ZOOM
 LEDPAR MIT 18 x 3W 3IN1 RGB LED, ZOOM
 PROJECTEUR PAR À LED 18 x 3W 3IN1 RGB, ZOOM

A-000000-01615

ORDER CODE

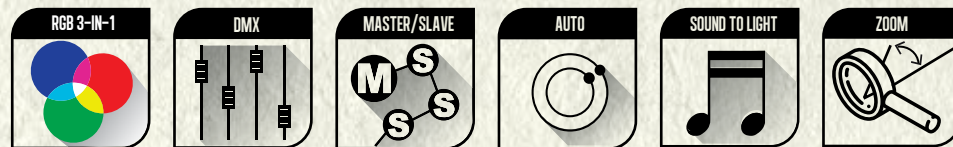


Color spectrum / Farbspektrum / Spectre de couleur	RGB
Number of LED / LED Anzahl / Nombre de LED	18
LED type / LED Typ / type de LED	9W 3IN1
Beam Angle / Abstrahlwinkel / Angle d'ouverture	15° - 60°
Illuminance / Beleuchtungsstärke / Luminosité	22000Lux @ 1m - 4800Lux @ 1m
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	5 or 8 channels
Controls / Bedienelemente / Contrôles	Mode, Up, Down, Enter
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	IEC input and output
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	170 W
Dimensions / Abmessungen / Dimensions	258 x 329 x 220 mm
Weight / Gewicht / Poids	4,5 kg

LED FS75

FOLLOWSPOT WITH 75W LED
VERFOLGER MIT 75W LED
PROJECTEUR POURSUITE LED 75W

A-000000-01651

ORDER CODE



IRIS


2-100%




ZOOM

14°-20°

GOBO SLOT



WHITE



DMX



STROBE




COLORWHEEL

Color spectrum / Farbspektrum / Spectre de couleur	White
Number of LED / LED Anzahl / Nombre de LED	1
LED type / LED Typ / type de LED	75W
Beam Angle / Abstrahlwinkel / Angle d'ouverture	14°-20°
Illuminance / Beleuchtungsstärke / Luminosité	8140Lux @ 2m - 4650Lux @ 2m
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	3 channels
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	IEC input
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	121 W
Dimensions / Abmessungen / Dimensions	279 x 560 x 284 mm
Weight / Gewicht / Poids	6,6 kg


LED FS150

FOLLOWSPOT WITH 150W LED
 VERFOLGER MIT 150W LED
 PROJECTEUR POURSUITE LED 150W

ORDER CODE A-000000-01652

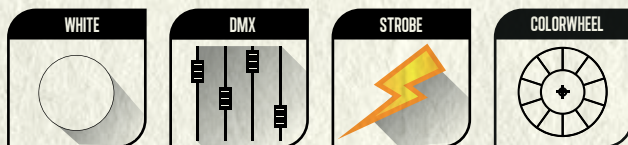

Color spectrum / Farbspektrum / Spectre de couleur	White
Number of LED / LED Anzahl / Nombre de LED	1
LED type / LED Typ / type de LED	140W
Beam Angle / Abstrahlwinkel / Angle d'ouverture	8°-11°
Illuminance / Beleuchtungsstärke / Luminosité	19200Lux @ 3m - 12100Lux @ 3m
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	3 channels
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	IEC input
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	200 W
Dimensions / Abmessungen / Dimensions	280x 558 x 340 mm
Weight / Gewicht / Poids	7,5 kg

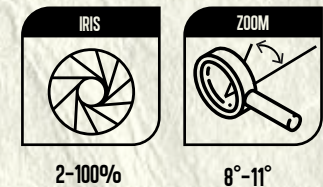

WASH / SPOT LIGHTING

OUTDOOR



LEDPAR35W

LEDPAR WITH 3 x 10W 5IN1 RGBWA LED, OUTDOOR
 LEDPAR MIT 3 x 10W 5IN1 RGBWA LED, OUTDOOR
 PROJECTEUR EXTERIEUR À LED 3 x 10W 5IN1 RGBWA

ORDER CODE A-000000-01593



Color spectrum / Farbspektrum / Spectre de couleur	RGBWA
Number of LED / LED Anzahl / Nombre de LED	3
LED type / LED Typ / type de LED	10W 5IN1
Beam Angle / Abstrahlwinkel / Angle d'ouverture	28°
Illuminance / Beleuchtungsstärke / Luminosité	2460Lux @ 1m
IP rating / IP Schutzklasse / Indice de protection	IP66
DMX input / DMX Eingang / Entrée DMX	3-pin special connector
DMX output / DMX Ausgang / Sortie DMX	3-pin special connector
DMX Mode / DMX Modus / Mode DMX	5, 7 or 9 channels
Controls / Bedienelemente / Contrôles	Mode, Up, Down, Enter
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	3-pin special connector
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	24 W
Dimensions / Abmessungen / Dimensions	220 x 194 x 113 mm
Weight / Gewicht / Poids	1,9 kg



LEDPAR95W

LEDPAR WITH 9 x 10W 5IN1 RGBWA LED, OUTDOOR

LEDPAR MIT 9 x 10W 5IN1 RGBWA LED, OUTDOOR

PROJECTEUR PAR À LED 9 x 10W 5IN1 RGBWA, OUTDOOR

ORDER CODE

A-000000-01594



Color spectrum / Farbspektrum / Spectre de couleur	RGBWA
Number of LED / LED Anzahl / Nombre de LED	9
LED type / LED Typ / type de LED	10W 5IN1
Beam Angle / Abstrahlwinkel / Angle d'ouverture	28°
Illuminance / Beleuchtungsstärke / Luminosité	7700Lux @ 1m
IP rating / IP Schutzklasse / Indice de protection	IP66
DMX input / DMX Eingang / Entrée DMX	3-pin special connector
DMX output / DMX Ausgang / Sortie DMX	3-pin special connector
DMX Mode / DMX Modus / Mode DMX	5, 7 or 9 channels
Controls / Bedienelemente / Contrôles	Mode, Up, Down, Enter
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	3-pin special connector
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	66 W
Dimensions / Abmessungen / Dimensions	300 x 271 x 106 mm
Weight / Gewicht / Poids	3,6 kg

LEDPAR154W

LEDPAR WITH 15 x 8W 4IN1 RGBW LED, OUTDOOR
 LEDPAR MIT 15 x 8W 4IN1 RGBW LED, OUTDOOR
 PROJECTEUR PAR À LED 15 x 8W 4IN1 RGBW, OUTDOOR


A-000000-01636

ORDER CODE



Color spectrum / Farbspektrum / Spectre de couleur	RGBW
Number of LED / LED Anzahl / Nombre de LED	15
LED type / LED Typ / type de LED	18W 4IN1
Beam Angle / Abstrahlwinkel / Angle d'ouverture	28°
Illuminance / Beleuchtungsstärke / Luminosité	13100Lux @ 1m
IP rating / IP Schutzklasse / Indice de protection	IP66
DMX input / DMX Eingang / Entrée DMX	3-pin special connector
DMX output / DMX Ausgang / Sortie DMX	3-pin special connector
DMX Mode / DMX Modus / Mode DMX	4, 6 or 8 channels
Controls / Bedienelemente / Contrôles	Mode, Up, Down, Enter
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	3-pin special connector
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	80 W
Dimensions / Abmessungen / Dimensions	310 x 148 x 327 mm
Weight / Gewicht / Poids	4,38 kg



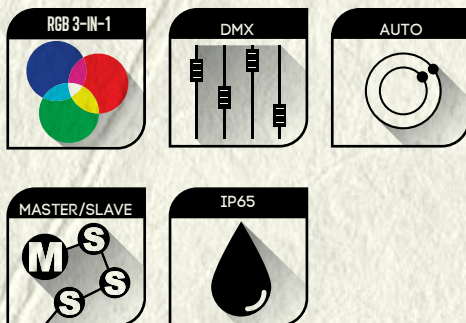

COBPAR65TW

LED PAR WITH 60W 3IN1 RGB COB LED, OUTDOOR
 LEDPAR MIT 60W 3IN1 RGB COB LED, OUTDOOR
 PROJECTEUR PAR À LED 60W 3IN1 RGB COB, OUTDOOR

A-000000-01595

ORDER CODE

Color spectrum / Farbspektrum / Spectre de couleur	RGB
Number of LED / LED Anzahl / Nombre de LED	1
LED type / LED Typ / type de LED	60W 3IN1 COB
Beam Angle / Abstrahlwinkel / Angle d'ouverture	90°
Illuminance / Beleuchtungsstärke / Luminosité	2370Lux @ 1m
IP rating / IP Schutzklasse / Indice de protection	IP66
DMX input / DMX Eingang / Entrée DMX	3-pin special connector
DMX output / DMX Ausgang / Sortie DMX	3-pin special connector
DMX Mode / DMX Modus / Mode DMX	3, 5 or 7 channels
Controls / Bedienelemente / Contrôles	Mode, Up, Down, Enter
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	3-pin special connector
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	65 W
Dimensions / Abmessungen / Dimensions	279 x 188 x 330 mm
Weight / Gewicht / Poids	4,2 kg




LEDARCH2015

LED FLOOD LIGHT 20 x 15W 5IN1 RGBWA LED, OUTDOOR

LED FLUTER MIT 20 x 15W 5IN1 RGBWA LED, OUTDOOR

PROJECTEUR EXTÉRIEUR ARCHITECTURAL À LED 20 x 15W 5IN1 RGBWA

ORDER CODE A-000000-05820

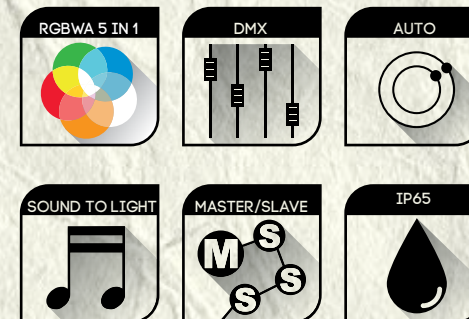

Color spectrum / Farbspektrum / Spectre de couleur	RGBWA
Number of LED / LED Anzahl / Nombre de LED	20
LED type / LED Typ / type de LED	15W 5IN1
Beam Angle / Abstrahlwinkel / Angle d'ouverture	25°
Illuminance / Beleuchtungsstärke / Luminosité	22960Lux @ 1m
IP rating / IP Schutzklasse / Indice de protection	IP65
DMX input / DMX Eingang / Entrée DMX	3-pin special connector
DMX output / DMX Ausgang / Sortie DMX	3-pin special connector
DMX Mode / DMX Modus / Mode DMX	5, 7 or 8 channels
Controls / Bedienelemente / Contrôles	Mode, Up, Down, Enter
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	3-pin special connector
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	300 W
Dimensions / Abmessungen / Dimensions	220 x 340 x 280 mm
Weight / Gewicht / Poids	7,5 kg


LEDARCH2410

LED FLOOD LIGHT 24 x 10W 4IN1 RGBW LED, OUTDOOR

LED FLUTER MIT 24 x 10W 4IN1 RGBW LED, OUTDOOR

PROJECTEUR EXTÉRIEUR ARCHITECTURAL À LED 24 x 10W 4IN1 RGBW

ORDER CODE A-000000-05821

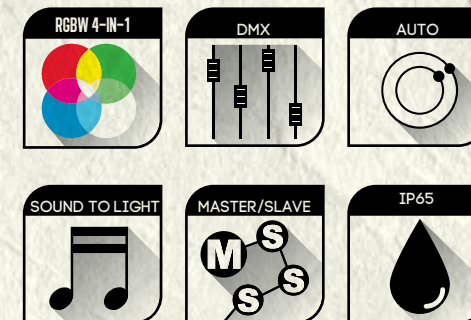

Color spectrum / Farbspektrum / Spectre de couleur	RGBW
Number of LED / LED Anzahl / Nombre de LED	24
LED type / LED Typ / type de LED	10W 4IN1
Beam Angle / Abstrahlwinkel / Angle d'ouverture	25°
Illuminance / Beleuchtungsstärke / Luminosité	37100Lux @ 1m
IP rating / IP Schutzklasse / Indice de protection	IP65
DMX input / DMX Eingang / Entrée DMX	3-pin special connector
DMX output / DMX Ausgang / Sortie DMX	3-pin special connector
DMX Mode / DMX Modus / Mode DMX	4 or 9 channels
Controls / Bedienelemente / Contrôles	Mode, Up, Down, Enter
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	3-pin special connector
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	280 W
Dimensions / Abmessungen / Dimensions	220 x 340 x 280 mm
Weight / Gewicht / Poids	7,5 kg

LEDBAR395

LEDBAR WITH 24 X 3W 3IN1 RGB LED, OUTDOOR
 LEDBAR MIT 24 X 3W 3IN1 RGB LED, OUTDOOR
 RAMPE LINÉAIRE LED 24 X 3W 3IN1 RGB, OUTDOOR

A-000000-01502

ORDER CODE




Color spectrum / Farbspektrum / Spectre de couleur	RGB
Number of LED / LED Anzahl / Nombre de LED	24
LED type / LED Typ / type de LED	3W 3IN1
Beam Angle / Abstrahlwinkel / Angle d'ouverture	40°
Illuminance / Beleuchtungsstärke / Luminosité	4934Lux @ 1m
IP rating / IP Schutzklasse / Indice de protection	IP65
DMX input / DMX Eingang / Entrée DMX	3-pin special connector
DMX output / DMX Ausgang / Sortie DMX	3-pin special connector
DMX Mode / DMX Modus / Mode DMX	3 or 5 channels
Controls / Bedienelemente / Contrôles	Mode, Up, Down, Enter
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	3-pin special connector
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	80 W
Dimensions / Abmessungen / Dimensions	1116 x 120 x 131 mm
Weight / Gewicht / Poids	6,5 kg



40°



IRC OPTIONAL





SONICWAVE1810W

LEDBAR WITH 18 X 8W 4IN1 RGBW LED, OUTDOOR
LEDPBAR MIT 18 X 8W 4IN1 RGBW LED, OUTDOOR
RAMPE LINÉAIRE LED 18 X 8W 4IN1 RGBW, OUTDOOR

A-000000-05365

ORDER CODE

Color spectrum / Farbspektrum / Spectre de couleur	RGBW
Number of LED / LED Anzahl / Nombre de LED	18
LED type / LED Typ / type de LED	8W 4IN1
Beam Angle / Abstrahlwinkel / Angle d'ouverture	18°
Illuminance / Beleuchtungsstärke / Luminosité	16010Lux @ 1m
IP rating / IP Schutzklasse / Indice de protection	IP66
DMX input / DMX Eingang / Entrée DMX	3-pin special connector
DMX output / DMX Ausgang / Sortie DMX	3-pin special connector
DMX Mode / DMX Modus / Mode DMX	2, 6 or 72 channels
Controls / Bedienelemente / Contrôles	Mode, Up, Down, Enter
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	3-pin special connector
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	190 W
Dimensions / Abmessungen / Dimensions	1027 x 170 x 221 mm
Weight / Gewicht / Poids	7,6 kg



PIXEL CONTROL



LEDBAR500



LED FLOOD LIGHT 44 X 3W 3IN1 RGB LED, OUTDOOR

LED FLUTER MIT 44 X 3W 3IN1 RGB LED, OUTDOOR

RAMPE LINÉAIRE LED 44 X 3W 3IN1 RGB, OUTDOOR

ORDER CODE

A-000000-01512



Color spectrum / Farbspektrum / Spectre de couleur	RGB
Number of LED / LED Anzahl / Nombre de LED	44
LED type / LED Typ / type de LED	3W 3IN1
Beam Angle / Abstrahlwinkel / Angle d'ouverture	45°
Illuminance / Beleuchtungsstärke / Luminosité	10700Lux @ 1m
IP rating / IP Schutzklasse / Indice de protection	IP66
DMX input / DMX Eingang / Entrée DMX	3-pin special connector
DMX output / DMX Ausgang / Sortie DMX	3-pin special connector
DMX Mode / DMX Modus / Mode DMX	5, 8 or 9 channels
Controls / Bedienelemente / Contrôles	Mode, Up, Down, Enter
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	3-pin special connector
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	152 W
Dimensions / Abmessungen / Dimensions	1027 x 160 x 213 mm
Weight / Gewicht / Poids	11,3 kg



45°



LED BARS / WALL WASHER

INDOOR





LEDBAR308

LEDBAR WITH 320 10MM RGB LED
 LEDPBAR MIT 320 10MM RGB LED
 RAMPE LINÉAIRE LED 320 10MM RGB

A-000000-01506

ORDER CODE

Color spectrum / Farbspektrum / Spectre de couleur	RGB
Number of LED / LED Anzahl / Nombre de LED	320
LED type / LED Typ / type de LED	10mm
Beam Angle / Abstrahlwinkel / Angle d'ouverture	30°
Illuminance / Beleuchtungsstärke / Luminosité	2330Lux @ 1m
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	2, 3, 4, 7, 14 or 26 channels
Controls / Bedienelemente / Contrôles	Mode, Up, Down, Enter
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	IEC input and output
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	36 W
Dimensions / Abmessungen / Dimensions	1070 x 65 x 88,5 mm
Weight / Gewicht / Poids	2,6 kg



8 CONTROLLABLE SEGMENTS



Color spectrum / Farbspektrum / Spectre de couleur	RGB
Number of LED / LED Anzahl / Nombre de LED	240
LED type / LED Typ / type de LED	10mm
Beam Angle / Abstrahlwinkel / Angle d'ouverture	30°
Illuminance / Beleuchtungsstärke / Luminosité	1087Lux @ 1m
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	2, 3, 5, 7 or 24 channels
Controls / Bedienelemente / Contrôles	Mode, Up, Down, Enter
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	IEC input
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	42 W
Dimensions / Abmessungen / Dimensions	1073 x 120 x 135 mm
Weight / Gewicht / Poids	4,4 kg

BATBAR230


LEDBAR WITH 240 X 10MM RGB LED, BATTERY POWERED

LEDBAR MIT 240 X 10MM RGB LED, BATTERIEBETRIEB

RAMPE LINÉAIRE LED 240 X 10MM RGB SUR BATTERIE

A-000000-01642

ORDER CODE



LITHIUM BATTERY LIFE: 6 HOURS FULL ON (WITH A FULL CHARGE)



30°

SONICWAVE1231



LEDBAR WITH 12 X 3W 3IN1 RGB LED

LEDBAR MIT 12 X 3W 3IN1 RGB LED

RAMPE LINÉAIRE LED 12 X 3W 3IN1 RGB

ORDER CODE

A-000000-01507



Color spectrum / Farbspektrum / Spectre de couleur	RGB
Number of LED / LED Anzahl / Nombre de LED	12
LED type / LED Typ / type de LED	3W 3IN1
Beam Angle / Abstrahlwinkel / Angle d'ouverture	30°
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	3, 4, 6, 7, 9, 12, 18 or 36 channels
Controls / Bedienelemente / Contrôles	Mode, Up, Down, Setup
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	IEC input and output
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	56 W
Dimensions / Abmessungen / Dimensions	1070 x 120 x 73mm
Weight / Gewicht / Poids	4,2 kg



FULL PIXEL CONTROL

30°

COBBAR415

LEDBAR WITH 4 X 15W 3IN1 RGB COB LED

LEDBAR MIT 4 X 15W 3IN1 RGB COB LED

RAMPE LINÉAIRE LED 4 X 15W 3IN1 RGB COB

ORDER CODE A-000000-01635

FULL PIXEL CONTROL



Color spectrum / Farbspektrum / Spectre de couleur	RGB
Number of LED / LED Anzahl / Nombre de LED	4
LED type / LED Typ / type de LED	15W COB
Beam Angle / Abstrahlwinkel / Angle d'ouverture	55°
Illuminance / Beleuchtungsstärke / Luminosité	1975Lux @ 1m
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	2, 3, 5, 6 or 12 channels
Controls / Bedienelemente / Contrôles	Mode, Setup, Up, Down
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	Powercon input and output
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	60 W
Dimensions / Abmessungen / Dimensions	423 x 245 x 85 mm
Weight / Gewicht / Poids	3,3 kg





COBBAR815

LEDBAR WITH 8 X 15W 3IN1 RGB COB LED
 LEDBAR MIT 8 X 15W 3IN1 RGB COB LED
 RAMPE LINÉAIRE LED 8 X 15W 3IN1 RGB COB


A-000000-01638

ORDER CODE

Color spectrum / Farbspektrum / Spectre de couleur	RGB
Number of LED / LED Anzahl / Nombre de LED	8
LED type / LED Typ / type de LED	15W COB
Beam Angle / Abstrahlwinkel / Angle d'ouverture	55°
Illuminance / Beleuchtungsstärke / Luminosité	3340Lux @ 1m
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	2, 3, 5, 6, 12 or 24 channels
Controls / Bedienelemente / Contrôles	Mode, Setup, Up, Down
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	Powercon input and output
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	120W
Dimensions / Abmessungen / Dimensions	771 x 159 x 120 mm
Weight / Gewicht / Poids	4,5 kg



55°



COB LED

FULL PIXEL CONTROL





LEDBAR91 UV

LEDBAR WITH 9 X 1W UV LED
LEDBAR MIT 9 X 1W UV LED
RAMPE LINÉAIRE LED 9 X 1W UV

A-000000-00521 ORDER CODE


Color spectrum / Farbspektrum / Spectre de couleur	UV
Number of LED / LED Anzahl / Nombre de LED	9
LED type / LED Typ / type de LED	1W
Power connector / Stromversorgungsanschluss / Raccordement	Power cord
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	12W
Dimensions / Abmessungen / Dimensions	575 x 160 x 140 mm
Weight / Gewicht / Poids	2,64 kg

LEDBAR181 UV

LEDBAR WITH 18 X 1W UV LED
 LEDBAR MIT 18 X 1W UV LED
 RAMPE LINÉAIRE LED 18 X 1W UV

ORDER CODE A-000000-00522

Color spectrum / Farbspektrum / Spectre de couleur	UV
Number of LED / LED Anzahl / Nombre de LED	18
LED type / LED Typ / type de LED	1W
Power connector / Stromversorgungsanschluss / Raccordement	Power cord
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	26W
Dimensions / Abmessungen / Dimensions	1085 x 160 x 135 mm
Weight / Gewicht / Poids	4,52 kg

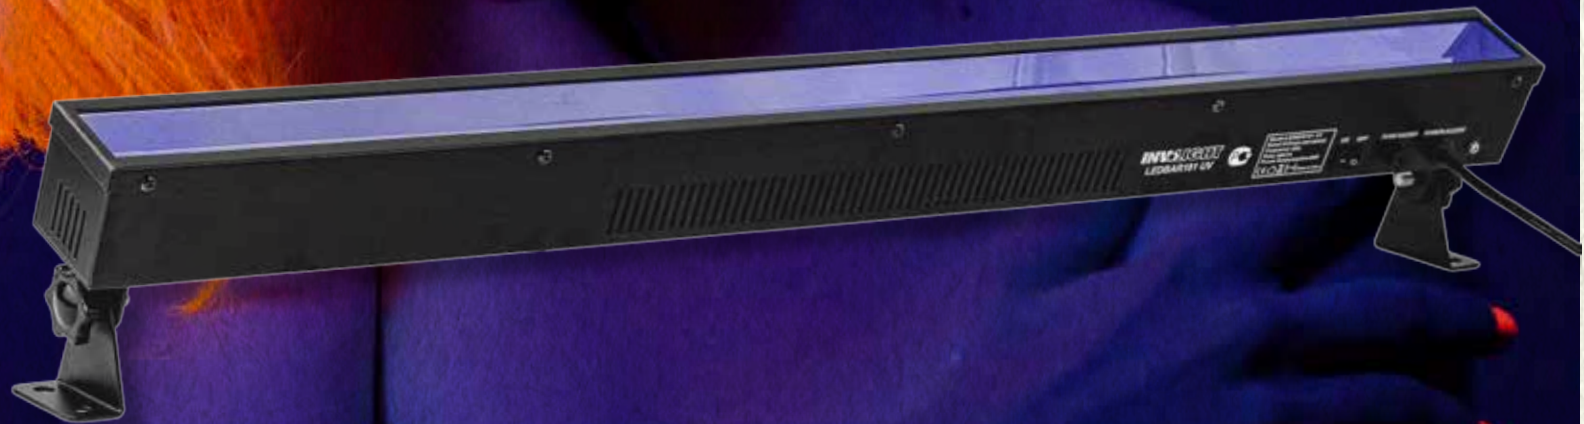

LED EFFECTS

FLOWER, DERBY, STROBE



LEDBALL33

LED EFFECT LIGHT WITH 6 x 3W RGB LED

LED EFFEKTLICHT MIT 6 x 3W RGB LED

EFFETS DISCOTHÈQUE À LED 6 x 3W RGB

A-000000-00516

ORDER CODE



Color spectrum / Farbspektrum / Spectre de couleur	RGB
Number of LED / LED Anzahl / Nombre de LED	6
LED type / LED Typ / type de LED	3W
DMX input / DMX Eingang / Entrée DMX	-
DMX output / DMX Ausgang / Sortie DMX	-
DMX Mode / DMX Modus / Mode DMX	-
Controls / Bedienelemente / Contrôles	-
Display	-
Power connector / Stromversorgungsanschluss / Raccordement	Power cord
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	24W
Dimensions / Abmessungen / Dimensions	175 x 175 x 150 mm
Weight / Gewicht / Poids	0,6 kg

LEDBALL53


LED EFFECT LIGHT WITH 6 x 3W RGB LED

LED EFFEKTLICHT MIT 6 x 3W RGB LED

EFFETS DISCOTHÈQUE À LED 6 x 3W RGB

ORDER CODE

A-000000-00517

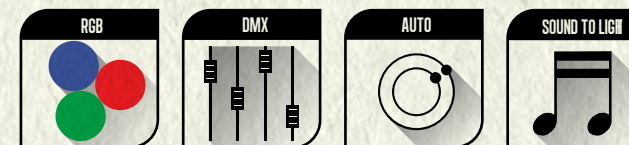

Color spectrum / Farbspektrum / Spectre de couleur	RGB
Number of LED / LED Anzahl / Nombre de LED	6
LED type / LED Typ / type de LED	3W
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	5 channels
Controls / Bedienelemente / Contrôles	Mode, Setup, Up, Down
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	Power cord
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	24W
Dimensions / Abmessungen / Dimensions	175 x 175 x 150 mm
Weight / Gewicht / Poids	0,6 kg


LEDRX350

LED EFFECT LIGHT WITH 256 5MM RGBWY LED
 LED EFFEKTLICHT MIT 256 5MM RGBWY LED
 EFFETS DISCOTHÈQUE À LED 256 5MM RGBWY

A-000000-00499

ORDER CODE

Color spectrum / Farbspektrum / Spectre de couleur	RGBWY
Number of LED / LED Anzahl / Nombre de LED	256
LED type / LED Typ / type de LED	5mm
Beam Angle lens/ Abstrahlwinkel je Linse/ Angle d'ouverture	15°
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	2 or 3 channels
Controls / Bedienelemente / Contrôles	Mode, Setup, Up, Down
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	IEC input
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	45W
Dimensions / Abmessungen / Dimensions	930 x 150 x 150 mm
Weight / Gewicht / Poids	5,7 kg






VENTUS XS

LED FLOWER EFFECT LIGHT WITH STROBE
LED STRAHLENEFFEKT FLOWER MIT STROBE
EFFETS DISCOTHÈQUE TYPE FLOWER PLUS STROBE

A-000000-05851

ORDER CODE

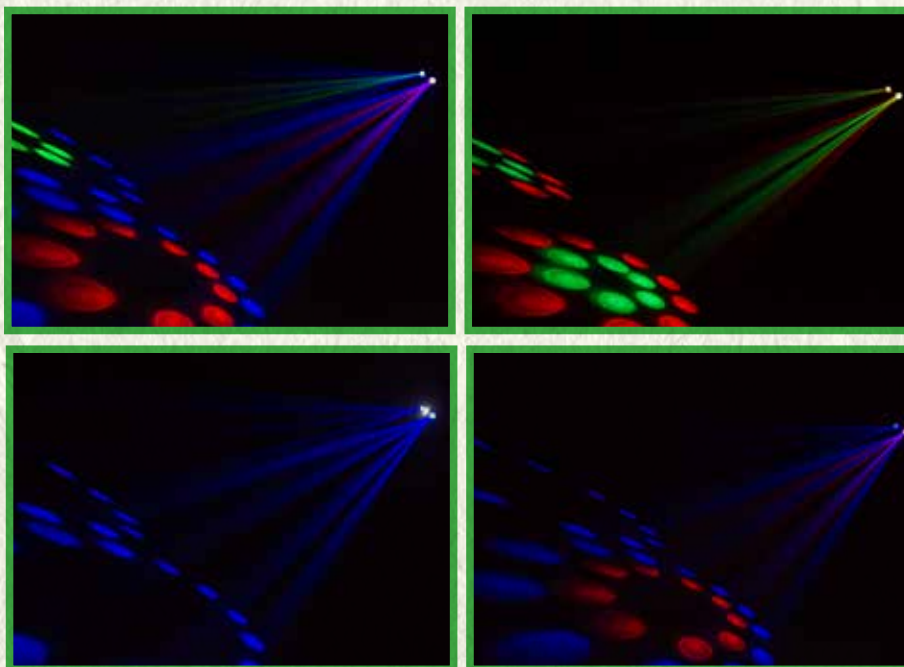

Color spectrum / Farbspektrum / Spectre de couleur	RGB
Number of LED flower/ LED Anzahl Flower/ Nombre de LED flower	54
LED type flower/ LED Typ Flower / type de LED flower	5mm
Number of LED strobe/ LED Anzahl Strobe/ Nombre de LED strobe	12
LED type of strobe/ LED Typ Strobe / type de LED strobe	1W SMD
Functions / Funktionen / Fonctions	Auto/Sound Mode
Controls / Bedienelemente / Contrôles	ON/OFF, Auto/Sound, Programs, Speed
Display	-
Power connector / Stromversorgungsanschluss / Raccordement	IEC input
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	18W
Dimensions / Abmessungen / Dimensions	230 x 220 x 130 mm
Weight / Gewicht / Poids	1,2 kg

VENTUS S

LED DERBY EFFECT LIGHT WITH STROBE

LED STRAHLENEFFEKT DERBY MIT STROBE

EFFETS DISCOTHÈQUE TYPE DERBY PLUS STROBE

A-000000-05852

ORDER CODE



Color spectrum / Farbspektrum / Spectre de couleur	RGB
Number of LED flower/ LED Anzahl Flower/ Nombre de LED flower	3
LED type flower/ LED Typ Flower / type de LED flower	3W
Number of LED strobe/ LED Anzahl Strobe/ Nombre de LED strobe	14
LED type of strobe/ LED Typ Strobe / type de LED strobe	0,5W SMD
Functions / Funktionen / Fonctions	Auto/Sound Mode
Controls / Bedienelemente / Contrôles	ON/OFF, Auto/Sound, Programs, Speed
Display	-
Power connector / Stromversorgungsanschluss / Raccordement	IEC input
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	18W
Dimensions / Abmessungen / Dimensions	235 x 205 x 130 mm
Weight / Gewicht / Poids	1,2 kg



VENTUS M

LED FLOWER EFFECT LIGHT WITH STROBE AND GRATING LASER
 LED STRAHLENEFFEKT FLOWER MIT STROBE UND GRATING LASER
 EFFETS DISCOTHÈQUE TYPE FLOWER PLUS STROBE ET LASER GRATING

ORDER CODE A-000000-05853



Color spectrum of Flower effect / Farbspektrum Flower Effekt / Spectre de Couleurs Effet Flower	RGBW
Number of LED flower effect/ LED Anzahl Flower Effekt / Nombre de LED Effet Flower	66
LED type of Flower effect / LED Typ Flower Effekt/ type de LED Fffet Flower	5mm
Number of LED strobe/ LED Anzahl Strobe/ Nombre de LED strobe	12
LED type of strobe/ LED Typ Strobe / type de LED strobe	1W SMD
Laser class laser effect / Laserklasse nach EN 60825-1 / Classe de laser Effet Laser	2M
Type od diodes laser effect / Dioden Typ Laser-Effekt / Puissance Diodes Effet Laser	Green 50mW, Red 100mW
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	4 or 8 channels
Controls / Bedienelemente / Contrôles	Mode, Setup, Up, Down
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	IEC input
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	20W
Dimensions / Abmessungen / Dimensions	380x285x130 mm
Weight / Gewicht / Poids	3,0 kg

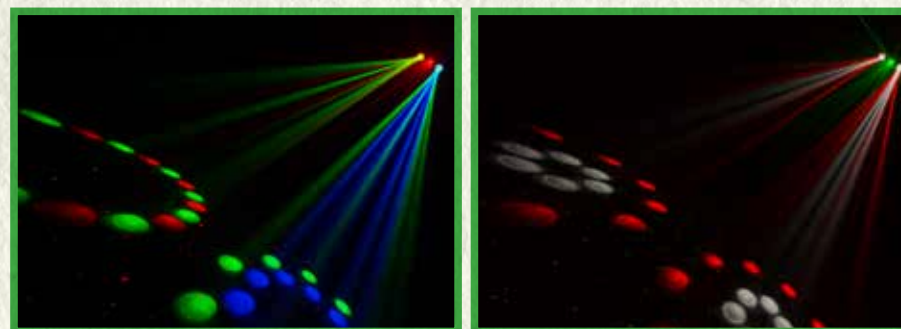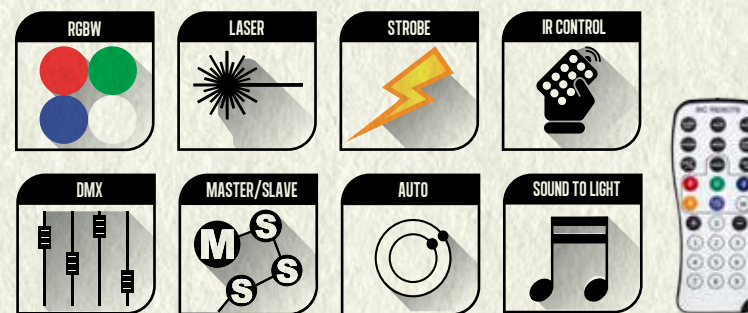

VENTUS L


LED DERBY EFFECT LIGHT WITH STROBE AND GRATING LASER
 LED STRAHLENEFFEKT DERBY MIT STROBE UND GRATING LASER
 EFFETS DISCOTHÈQUE TYPE DERBY PLUS STROBE ET LASER GRATING

A-000000-05854

ORDER CODE



Color spectrum of Derby effect / Farbspektrum Derby Effekt / Spectre de Couleurs Effet Derby	RGBW
Number of LED Derby effect / LED Anzahl Derby Effekt / Nombre de LED Effet Derby	4
LED type of Derby effect / LED Typ Flower Effekt / type de LED Effet Derby	3W
Number of LED strobe / LED Anzahl Strobe / Nombre de LED strobe	16
LED type of strobe / LED Typ Strobe / type de LED strobe	0,5W SMD
Laser class laser effect / Laserklasse nach EN 60825-1 / Classe de laser Effet Laser	2M
Type od diodes laser effect / Dioden Typ Laser-Effekt / Puissance Diodes Effet Laser	Green 50mW, Red 100mW
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	4 channels
Controls / Bedienelemente / Contrôles	Mode, Setup, Up, Down
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	IEC input
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	20W
Dimensions / Abmessungen / Dimensions	260x235x180 mm
Weight / Gewicht / Poids	2,18 kg

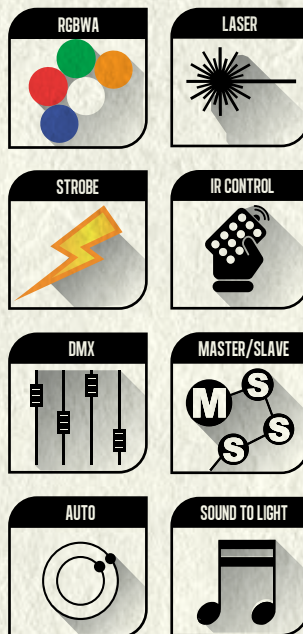

VENTUS XL

LED FLOWER EFFECT LIGHT WITH STROBE AND GRATING LASER
 LED STRAHLENEFFEKT FLOWER MIT STROBE UND GRATING LASER
 EFFETS DISCOTHÈQUE TYPE FLOWER PLUS STROBE ET LASER GRATING

A-000000-05855

ORDER CODE


Color spectrum of Flower effect / Farbspektrum Flower Effekt / Spectre de Couleurs Effet Flower	RGBWA
Number of LED flower effect / LED Anzahl Flower Effekt / Nombre de LED Effet Flower	25
LED type of Flower effect / LED Typ Flower Effekt / type de LED Fffet Flower	1W
Number of LED strobe / LED Anzahl Strobe / Nombre de LED strobe	12
LED type of strobe / LED Typ Strobe / type de LED strobe	1W SMD
Laser class laser effect / Laserklasse nach EN 60825-1 / Classe de laser Effet Laser	2M
Type od diodes laser effect / Dioden Typ Laser-Effekt / Puissance Diodes Effet Laser	Green 50mW, Red 100mW
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	4 or 9 channels
Controls / Bedienelemente / Contrôles	Mode, Setup, Up, Down
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	IEC input
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	80W
Dimensions / Abmessungen / Dimensions	350x340x260 mm
Weight / Gewicht / Poids	3,8 kg



VENTUS XXL

LED FLOWER EFFECT LIGHT, WASH, STROBE AND GRATING LASER
LED STRAHLENEFFEKT FLOWER, WASH, STROBE UND GRATING LASER
EFFETS DISCOTHÈQUE TYPE FLOWER, WASH, STROBE ET LASER

ORDER CODE A-000000-05856

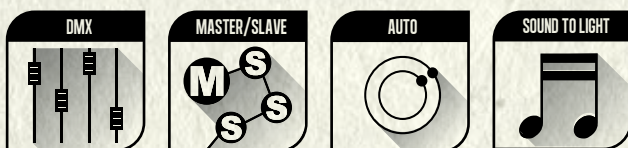

Color spectrum of Flower effect / Farbspektrum Flower Effekt / Spectre de Couleurs Effet Flower	RGBWA+UV
Number of LED Flower effect / LED Anzahl Flower Effekt / Nombre de LED Effet Flower	6
LED type of Flower effect / LED Typ Flower Effekt / type de LED Fffet Flower	3W
Color spectrum of Wash effect / Farbspektrum Wash Effekt / Spectre de Couleurs Effet Wash	RGB+UV
Number of LED Wash effect / LED Anzahl Wash Effekt / Nombre de LED Effet Wash	8
LED type Wash effect / LED Typ Wash Effekt / type de LED Fffet Wash	4W 4IN1
Number of LED strobe / LED Anzahl Strobe / Nombre de LED strobe	12
LED type of strobe / LED Typ Strobe / type de LED strobe	1W SMD
Laser class laser effect / Laserklasse nach EN 60825-1 / Classe de laser Effet Laser	2M
Type of diodes laser effect / Dioden Typ Laser-Effekt / Puissance Diodes Effet Laser	Green 50mW, Red 100mW
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	4 or 13 channels
Controls / Bedienelemente / Contrôles	Mode, Setup, Up, Down
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	IEC input and output
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	80W
Dimensions / Abmessungen / Dimensions	350x340x280 mm
Weight / Gewicht / Poids	4,8 kg

LEDRX350HP

LED EFFECT LIGHT WITH 16 x 3W RGBW LED

LED EFFEKTLICHT MIT 16 x 3W RGBW LED

EFFETS DISCOTHÈQUE À LED 16 x 3W RGBW

ORDER CODE

A-000000-04898



Color spectrum / Farbspektrum / Spectre de couleur	RGBW
Number of LED / LED Anzahl / Nombre de LED	16
LED type / LED Typ / type de LED	3W
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	3, 7 or 16 channels
Controls / Bedienelemente / Contrôles	Mode, Setup, Up, Down
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	IEC input and output
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	55 W
Dimensions / Abmessungen / Dimensions	755 x 160 x 167 mm
Weight / Gewicht / Poids	3,9 kg





OB200

LED EFFECT LIGHT WITH 18 x 3W RGB LED
 LED EFFEKTLICHT MIT 18 x 3W RGB LED
 EFFETS DISCOTHÈQUE À LED 18 x 3W RGB

A-000000-00513

ORDER CODE

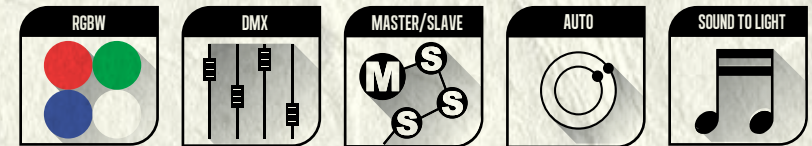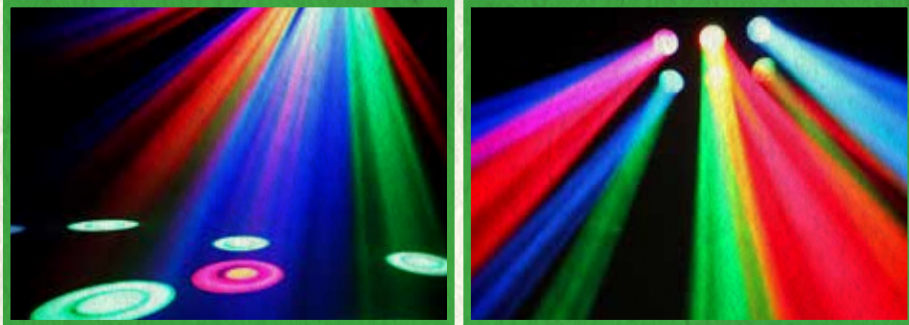

Color spectrum / Farbspektrum / Spectre de couleur	RGB
Number of LED / LED Anzahl / Nombre de LED	18
LED type / LED Typ / type de LED	3W
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	3 channels
Controls / Bedienelemente / Contrôles	Mode, Setup, Up, Down
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	IEC input
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	45 W
Dimensions / Abmessungen / Dimensions	338 x 235 x 296 mm
Weight / Gewicht / Poids	4,1 kg

OB320 / OB350

LED EFFECT LIGHT WITH 32 x 3W 3IN1 RGB LED
LED EFFEKTLICHT MIT 32 x 3W 3IN1 RGB LED
EFFETS DISCOTHÈQUE À LED 32 x 3W 3IN1 RGB

A-000000-00503 ORDER CODE

A-000000-00507 ORDER CODE



Color spectrum / Farbspektrum / Spectre de couleur	RGB
Number of LED / LED Anzahl / Nombre de LED	32
LED type / LED Typ / type de LED	3W 3IN1
Beam Angle / Abstrahlwinkel / Angle d'ouverture	10° / 40°
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	7 or 26 channels
Controls / Bedienelemente / Contrôles	Mode, Setup, Up, Down
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	IEC input
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	110W
Dimensions / Abmessungen / Dimensions	553 x 170 x 340 mm
Weight / Gewicht / Poids	5,5 kg

RX300HP



LED EFFECT LIGHT WITH 12 x 3W RGBW LED

LED EFFEKTLICHT MIT 12 x 3W RGBW LED


EFFETS DISCOTHÈQUE À LED 12 x 3W RGBW

ORDER CODE

A-000000-00525



Color spectrum / Farbspektrum / Spectre de couleur	RGBW
Number of LED / LED Anzahl / Nombre de LED	12
LED type / LED Typ / type de LED	3W
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	3 or 4 channels
Controls / Bedienelemente / Contrôles	Mode, Setup, Up, Down
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	IEC input
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	45W
Dimensions / Abmessungen / Dimensions	410 x 410 x 210 mm
Weight / Gewicht / Poids	4,5 kg

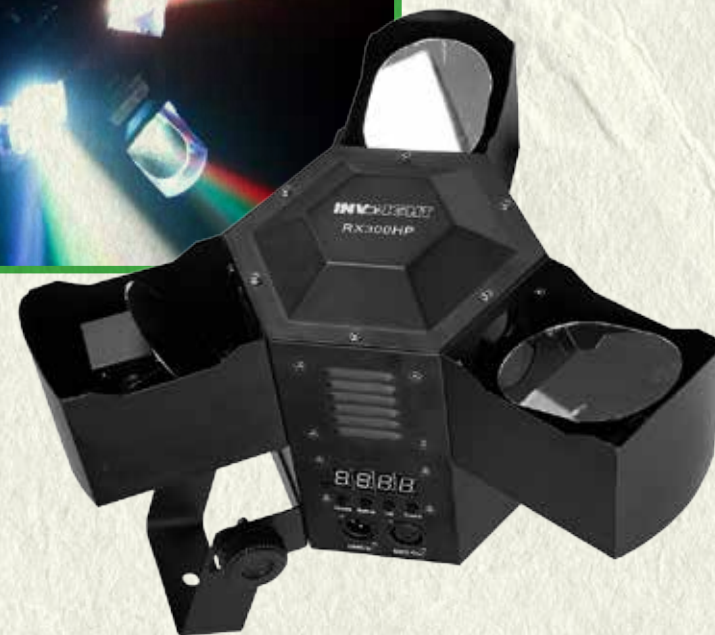

MATRIX449


MATRIX EFFECT WITH 16 X 9W 3IN1 RGB COB LED

MATRIX EFFEKT MIT 16 X 9W 3IN1 RGB COB LED

PROJECTEUR MATRIX 16 X 9W RGB COB LED

ORDER CODE


A-000000-01648

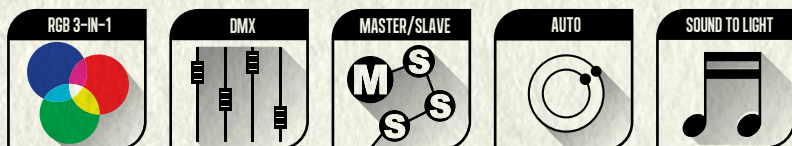

FULL PIXEL CONTROL



55°



COB LED

Color spectrum / Farbspektrum / Spectre de couleur	RGB
Number of LED / LED Anzahl / Nombre de LED	16
LED type / LED Typ / type de LED	9W 3IN1 COB
Beam Angle / Abstrahlwinkel / Angle d'ouverture	55°
Illuminance / Beleuchtungsstärke / Luminosité	4820Lux @ 1m
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	2, 3, 5, 12, 24 or 48 channels
Controls / Bedienelemente / Contrôles	Mode, Setup, Up, Down
Display	LCD
Power connector / Stromversorgungsanschluss / Raccordement	IEC input and output
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	155W
Dimensions / Abmessungen / Dimensions	340 x 340 x 105 mm
Weight / Gewicht / Poids	6,5 kg



MATRIX559

MATRIX EFFECT WITH 25 X 9W 3IN1 RGB COB LED

MATRIX EFFEKT MIT 25 X 9W 3IN1 RGB COB LED


PROJECTEUR MATRIX 25 X 9W 3IN1 RGB COB LED

A-000000-01649

ORDER CODE





55°



COB LED

FULL PIXEL CONTROL



Color spectrum / Farbspektrum / Spectre de couleur	RGB
Number of LED / LED Anzahl / Nombre de LED	25
LED type / LED Typ / type de LED	9W 3IN1 COB
Beam Angle / Abstrahlwinkel / Angle d'ouverture	55°
Illuminance / Beleuchtungsstärke / Luminosité	7580Lux @ 1m
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	3, 5 or 75 channels
Controls / Bedienelemente / Contrôles	Mode, Setup, Up, Down
Display	LCD
Power connector / Stromversorgungsanschluss / Raccordement	Powercon input and output
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	240W
Dimensions / Abmessungen / Dimensions	425 x 425 x 153 mm
Weight / Gewicht / Poids	11,5 kg

SBL2000




LIGHTING SET WITH 8 x 3 X 3W RGB 3IN1 LED

LICHTSET MIT 8 x 3 X 3W RGB 3IN1 LED

PACK DE 4 PROJECTEURS LED 8 x 3 X 3W RGB 3IN1

ORDER CODE

A-000000-00525



25°



Color spectrum / Farbspektrum / Spectre de couleur	RGB
Number of LED / LED Anzahl / Nombre de LED	8 X 3
LED type / LED Typ / type de LED	3W 3IN1
Beam Angle / Abstrahlwinkel / Angle d'ouverture	25°
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	7 or 26 channels
Controls / Bedienelemente / Contrôles	Mode, Setup, Up, Down
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	IEC input
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	90W
Dimensions / Abmessungen / Dimensions	902 x 69 x 254 mm
Weight / Gewicht / Poids	10 kg


SBL 1000HP LIITE

LIGHTING SET WITH 4 X 7 X 3W RGB 3IN1 LED

LICHTSET MIT 4 X 7 X 3W RGB 3IN1 LED

PACK DE 4 PROJECTEURS LED 4 X 7 X 3W RGB 3IN1

ORDER CODE A-000000-00532

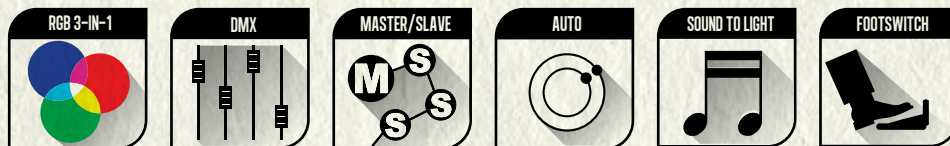

Color spectrum / Farbspektrum / Spectre de couleur	RGB
Number of LED / LED Anzahl / Nombre de LED	4 x 7
LED type / LED Typ / type de LED	3W 3IN1
Beam Angle / Abstrahlwinkel / Angle d'ouverture	40°
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	2, 3, 4, 7, 8, 14 or 15 channels
Controls / Bedienelemente / Contrôles	Mode, Setup, Up, Down
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	IEC input and output
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	82W
Dimensions / Abmessungen / Dimensions	682 x 56 x 237,5 mm
Weight / Gewicht / Poids	6,8 kg




40°





30°



COB LED

SBL5000COB


LIGHTING SET WITH 4 X 30W RGB 3IN1 COB LED
LICHTSET MIT 4 X 30W RGB 3IN1 COB LED
PACK DE 4 PROJECTEURS COB 4 X 30W RGB 3IN1 RGB

A-000000-00534

ORDER CODE



RGB 3-IN-1



DMX



MASTER/SLAVE



AUTO



SOUND TO LIGHT



FOOTSWITCH

Color spectrum / Farbspektrum / Spectre de couleur	RGB
Number of LED / LED Anzahl / Nombre de LED	4
LED type / LED Typ / type de LED	30W 3IN1 COB
Beam Angle / Abstrahlwinkel / Angle d'ouverture	30°
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	2, 3, 4, 7, 8, 14 or 15 channels
Controls / Bedienelemente / Contrôles	Mode, Setup, Up, Down
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	IEC input and output
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	90W
Dimensions / Abmessungen / Dimensions	890 x 276 x 102 mm
Weight / Gewicht / Poids	9 kg

LEDSTROB200

STROBE WITH 132 x 0,2W SMD LED
 STROBOSKOP MIT 132 x 0,2W SMD LED
 STROBOSCOPE LED 132 x 0,2W SMD

ORDER CODE A-000000-03960






Color spectrum / Farbspektrum / Spectre de couleur	White
Number of LED / LED Anzahl / Nombre de LED	132
LED type / LED Typ / type de LED	0,2W SMD
Beam Angle / Abstrahlwinkel / Angle d'ouverture	80°
Refresh rate / Wiederholrate / Taux de répétition	1 - 30Hz
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	4 channels
Controls / Bedienelemente / Contrôles	Menu, Enter, Up, Down
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	IEC input
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	35W
Dimensions / Abmessungen / Dimensions	353 x 118 x 75 mm
Weight / Gewicht / Poids	1,2 kg

LEDSTROB450

LED STROBE WITH 132 x 0,2W RGB SMD LED
LED STROBOSKOP MIT 132 x 0,2W RGB SMD LED
STROBOSCOPE LED 132 x 0,2W RGB SMD

A-000000-00540

ORDER CODE



Color spectrum / Farbspektrum / Spectre de couleur	RGB
Number of LED / LED Anzahl / Nombre de LED	132
LED type / LED Typ / type de LED	0,2W SMD
Beam Angle / Abstrahlwinkel / Angle d'ouverture	80°
Refresh rate / Wiederholrate / Taux de répétition	1 - 30Hz
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	6 or 8 channels
Controls / Bedienelemente / Contrôles	Menu, Enter, Up, Down
Display	LCD
Power connector / Stromversorgungsanschluss / Raccordement	Power connector input and output
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	42W
Dimensions / Abmessungen / Dimensions	430 x 280 x 190 mm
Weight / Gewicht / Poids	3,88 kg

LEDSTROB500

LED STROBE WITH 648 x 0,2W SMD LED

LED STROBOSKOP MIT 648 x 0,2W SMD LED

STROBOSCOPE LED 648 x 0,2W SMD

ORDER CODE A-000000-00539

4 CONTROLLABLE SEGMENTS




Color spectrum / Farbspektrum / Spectre de couleur	RGB
Number of LED / LED Anzahl / Nombre de LED	648
LED type / LED Typ / type de LED	0,2W SMD
Beam Angle / Abstrahlwinkel / Angle d'ouverture	80°
Refresh rate / Wiederholrate / Taux de répétition	1 - 30Hz
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
DMX Mode / DMX Modus / Mode DMX	4 channels
Controls / Bedienelemente / Contrôles	Menu, Enter, Up, Down
Display	LED
Power connector / Stromversorgungsanschluss / Raccordement	IEC input and output
Operating voltage / Betriebsspannung / Alimentation	100-240V AC, 50-60Hz
Power consumption / Leistungsaufnahme / Consommation	125W
Dimensions / Abmessungen / Dimensions	389 x 183,5 x 203,5 mm
Weight / Gewicht / Poids	3 kg



LIGHTING CONTROLS

DMX CONTROLLER, DIMMER, DISTRIBUTOR



DLHEX

DMX MIXING CONSOLE

DMX MISCHPULT

MÉLANGEUR DMX

ORDER CODE A-000000-05815

For 6IN1 RGBWA+UV LED fixture

6 fixture up to 6 channels each

24 color presets

1 user programmable color preset

Built-in microphone

DMX channels / Anzahl DMX-Kanäle / Canaux DMX 36

DMX output / DMX Ausgang / sortie DMX XLR 3 Pol-female

Power connector / Stromversorgungsanschluss / Raccordement External power supply

Operating voltage / Betriebsspannung / Alimentation DC9/12V

Dimensions / Abmessungen / Dimensions 400x158x68mm

Weight / Gewicht / Poids 1,45 kg



DL192

DMX MIXING CONSOLE

DMX MISCHPULT

MÉLANGEUR DMX

ORDER CODE

A-000000-01522

12 fixtures up to 16 channels each

240 programmable scenes

6 programmable chases

Built-in microphone

Joystick

DMX channels / Anzahl DMX-Kanäle / Canaux DMX 192

DMX output / DMX Ausgang / sortie DMX XLR 3 Pol-female

Display LCD

Power connector / Stromversorgungsanschluss / Raccordement External power supply

Operating voltage / Betriebsspannung / Alimentation DC9/12V

Dimensions / Abmessungen / Dimensions 482x134x85mm

Weight / Gewicht / Poids 2,7 kg



DL250

DMX MIXING CONSOLE
 DMX MISCHPULT
 MÉLANGEUR DMX

ORDER CODE A-000000-01517

12 fixtures up to 16 channels each

240 programmable scenes

6 programmable chases

Built-in microphone

Jog wheels

DMX channels / Anzahl DMX-Kanäle / Canaux DMX

240

DMX output / DMX Ausgang / sortie DMX

XLR 3 Pol-female

Display

LCD

Power connector / Stromversorgungsanschluss / Raccordement

External power supply

Operating voltage / Betriebsspannung / Alimentation

DC9/12V

Dimensions / Abmessungen / Dimensions

482x134x85mm

Weight / Gewicht / Poids

2,7 kg



16 fixtures up to 32 channels each

480 programmable scenes

6 programmable chases

Built-in microphone

Jog wheels

SD-card

DMX channels / Anzahl DMX-Kanäle / Canaux DMX

512

DMX output / DMX Ausgang / sortie DMX

XLR 3 Pol-female

Display

LCD

Power connector / Stromversorgungsanschluss / Raccordement

External power supply

Operating voltage / Betriebsspannung / Alimentation

DC12V

Dimensions / Abmessungen / Dimensions

482x200x74mm

Weight / Gewicht / Poids

3,1 kg

DL512

DMX MIXING CONSOLE

DMX MISCHPULT

MÉLANGEUR DMX

A-000000-00523

ORDER CODE



DL400

DMX MIXING CONSOLE

DMX MISCHPULT

MÉLANGEUR DMX

ORDER CODE A-000000-01518

Conventional dimming console

48 programmable scenes

12 programmable chases

12 individual channel faders

24 bump buttons

DMX channels / Anzahl DMX-Kanäle / Canaux DMX 24

DMX output / DMX Ausgang / sortie DMX XLR 3 Pol-female


Display LCD

Power connector / Stromversorgungsanschluss / Raccordement External power supply

Operating voltage / Betriebsspannung / Alimentation DC12V

Dimensions / Abmessungen / Dimensions 483x264x90mm

Weight / Gewicht / Poids 5 kg

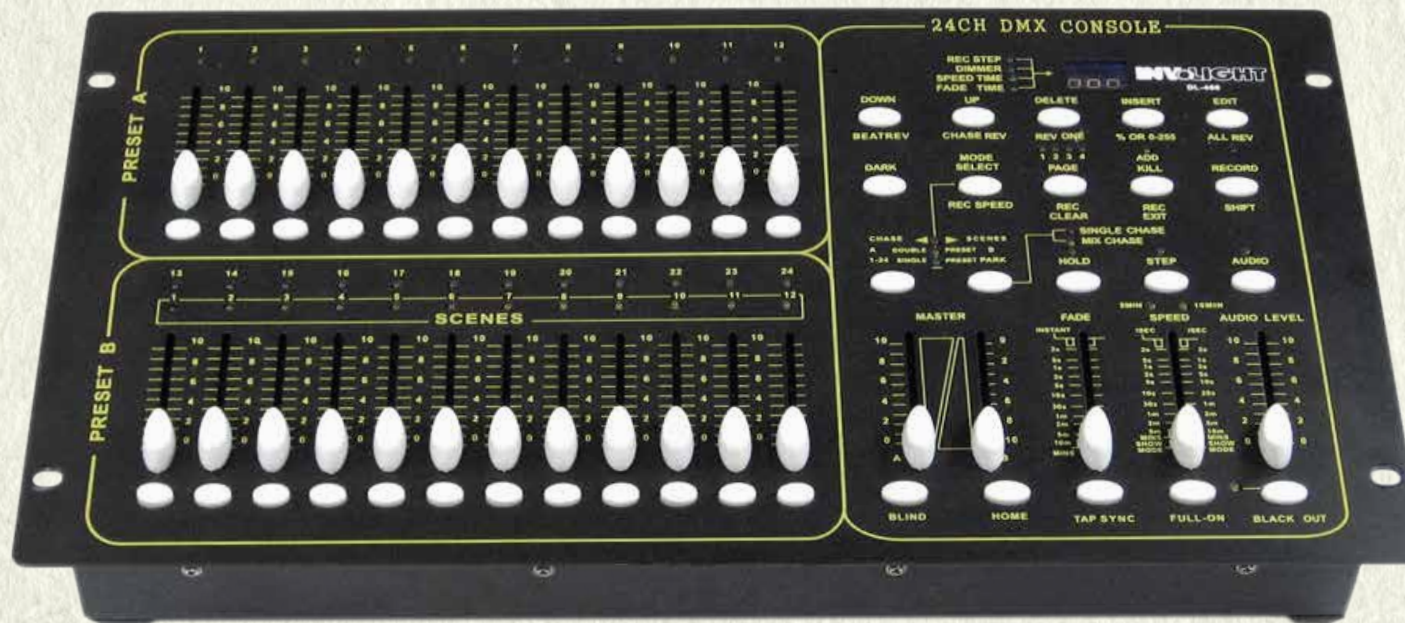

Conventi onl dimming console

96 programmable scenes

24 programmable chases

48 individual channel faders

48 bump buttons

DMX channels / Anzahl DMX-Kanäle / Canaux DMX 48

DMX output / DMX Ausgang / sortie DMX XLR 3 Pol-female

Indicators / Anzeigeelemente /Affichage LCD display

Power connector / Stromversorgungsanschluss / Raccordement External power supply

Operating voltage / Betriebsspannung / Alimentation DC12V

Dimensions / Abmessungen / Dimensions 710x266x90mm

Weight / Gewicht / Poids 6,3 kg

DL450


DMX MIXING CONSOLE

DMX MISCHPULT

MÉLANGEUR DMX

A-000000-01519

ORDER CODE

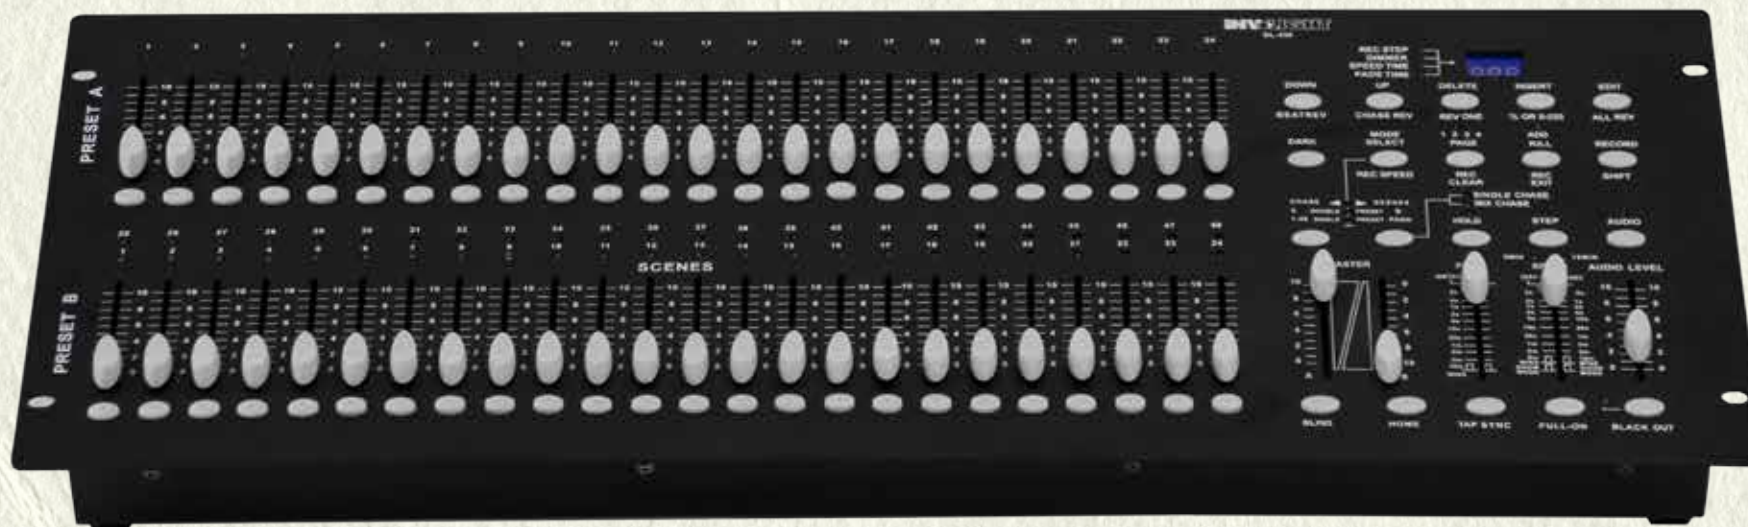

DMXD200

2 WAY DMX SPLITTER
 2 KANAL DMX VERTEILER
 DISTRIBUTEUR DMX

ORDER CODE A-000000-01524



INPUT & OUTPUT ARE ELECTRICALLY AND OPTICALLY ISOLATED FROM EACH OTHER

Power connector / Stromversorgungsanschluss / Raccordement	Power cord
Operating voltage / Betriebsspannung / Alimentation	AC240V, 50Hz
Dimensions / Abmessungen / Dimensions	245x160x70mm
Weight / Gewicht / Poids	1,7 kg

DMXD400

4 WAY DMX SPLITTER
 4 KANÄLE DMX VERTEILER
 DISTRIBUTEUR DMX

ORDER CODE A-000000-01525



INPUT & OUTPUT ARE ELECTRICALLY AND OPTICALLY ISOLATED FROM EACH OTHER

Power connector / Stromversorgungsanschluss / Raccordement	Power cord
Operating voltage / Betriebsspannung / Alimentation	AC240V, 50Hz
Dimensions / Abmessungen / Dimensions	277x172x72mm
Weight / Gewicht / Poids	2,6 kg

AD8

DMX channels / Anzahl DMX-Kanäle / Canaux DMX	4
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
Analog input / Analog Eingang / Entrée analogue	8-pin DIN
Analog output / Analog Ausgang / Sortie analogue	8-pin DIN
Total load / Gesamtlast / La charge totale	16A
Maximum load / Maximallast / La charge maximum	5A @ channel
Output / Ausgang / Sortie	4 x schuko socket
Operating voltage / Betriebsspannung / Alimentation	240V AC, 50Hz
Dimensions / Abmessungen / Dimensions	280x280x96 mm
Weight / Gewicht / Poids	3 kg

4 CANNEL DMX DIMMER PACK
4 KANAL DMX DIMMER PACK
BLOC DE PUISSANCE

A-000000-01515


ORDER CODE



DD6 SCHUKO

6 CHANNEL DMX DIMMER PACK
 & KANAL DMX DIMMER PACK
 BLOC DE PUISSANCE

ORDER CODE A-000000-01516

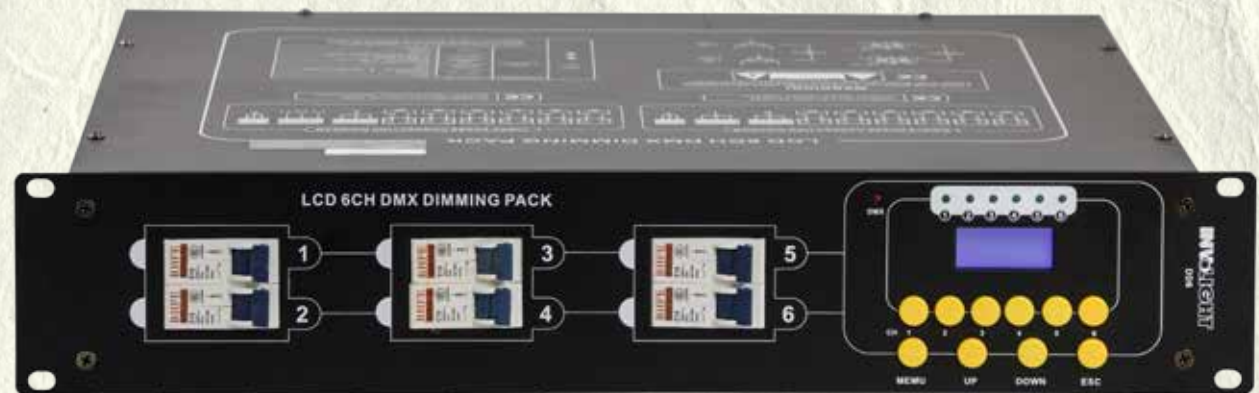

DMX channels / Anzahl DMX-Kanäle / Canaux DMX	6
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
Analog input / Analog Eingang / Entrée analogue	8-pin DIN
Analog output / Analog Ausgang / Sortie analogue	8-pin DIN
Display	LCD
Total load / Gesamtlast / La charge totale	16A @ phase
Maximum load / Maximallast / La charge maximum	10A @ channel
Output / Ausgang / Sortie	6 x schuko socket
Circuit-Breaker / Sicherungsautomat	6 x C 10 A
Operating voltage / Betriebsspannung / Alimentation	240V AC, 50Hz
Dimensions / Abmessungen / Dimensions	482x381x89 mm
Weight / Gewicht / Poids	9 kg

AD6 KLEMME

DMX DIMMER PACK
DMX DIMMER PACK
BLOC DE PUISSANCE

A-000000-01513

ORDER CODE




DMX channels / Anzahl DMX-Kanäle / Canaux DMX	6
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
Analog input / Analog Eingang / Entrée analogue	8-pin DIN
Analog output / Analog Ausgang / Sortie analogue	8-pin DIN
Total load / Gesamtlast / La charge totale	16A @ phase
Maximum load / Maximallast / La charge maximum	10A @ channel
Output / Ausgang / Sortie	16-Pol Multipin
Circuit-Breaker / Sicherungsautomat	6 x C 10 A
Operating voltage / Betriebsspannung / Alimentation	240V AC, 50Hz
Dimensions / Abmessungen / Dimensions	482x381x89 mm
Weight / Gewicht / Poids	9 kg

AD6 SCHUKO

DMX DIMMER PACK

DMX DIMMER PACK

BLOC DE PUISSANCE

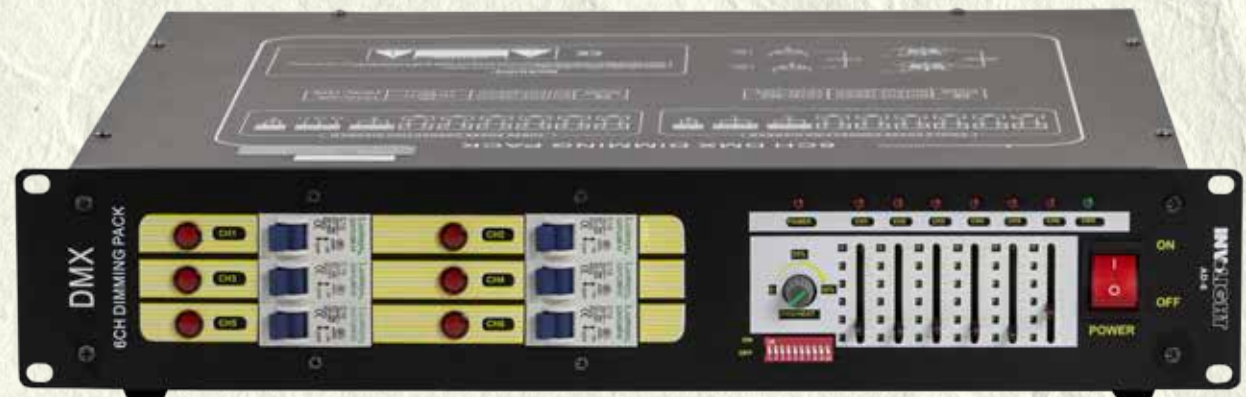ORDER CODE A-000000-01514


DMX channels / Anzahl DMX-Kanäle / Canaux DMX	6
DMX input / DMX Eingang / Entrée DMX	3-pin XLR
DMX output / DMX Ausgang / Sortie DMX	3-pin XLR
Analog input / Analog Eingang / Entrée analogue	8-pin DIN
Analog output / Analog Ausgang / Sortie analogue	8-pin DIN
Total load / Gesamtlast / La charge totale	16A @ phase
Maximum load / Maximallast / La charge maximum	10A @ channel
Output / Ausgang / Sortie	6 x schuko socket
Circuit-Breaker / Sicherungsautomat	6 x C 10 A
Operating voltage / Betriebsspannung / Alimentation	240V AC, 50Hz
Dimensions / Abmessungen / Dimensions	482x381x89 mm
Weight / Gewicht / Poids	9 kg



INV GROUP

Destilan Deutschland GmbH
Senefelder Ring 91
21465 Reinbek
Tel: +49 40-3030691-21/ 22/ 23
Fax: +49 40-3030691-10
info@destilan.de

Service commercial France:
+33 4 72 16 97 50 / +33 7 78 11 16 97
www.invgroup.eu

INV Music KFT
Hársfa U. 5-7
1074 Budapest
Tel: +36 1-789 8963
bolt@invmusic.hu